



Data Center ISO 40 ft Data Center Container





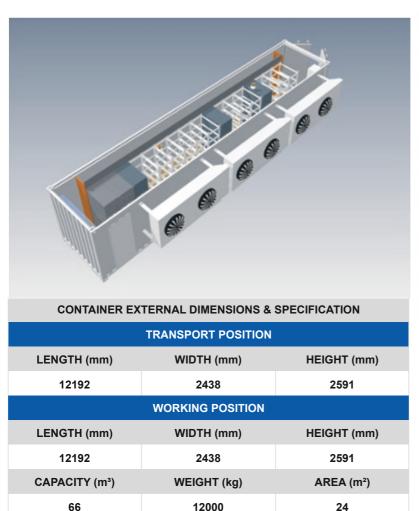





CAPABILITY

Unit will ensure storage conditions from -50C up to +50C. Unit can be stored in these conditions without external power up to 24h. Storage environment can be remotely monitored. Unit is designed and constructed in accordance with TIER 2 TIA standards.

Deployment time is 4 hours repacking time is 12 hours.

TECHNOLOGY & EQUIPMENT

Containerized Datacenter up to 40 m2; UPS modular up to 160 kW; UPS stand-by at 50kW IT load 20 min. Cooling capacity up to 80 kW up to 12 computer racks 110x600; 3 In-Row coolers, 3 condensers; Power distribution board with an automatic bypass (2x Main Grid; UPS; Generator), Fire suppression system NOVEC, Monitoring System Zabbix.

INTERNATIONAL STANDARDS

EN ISO 9001; EN ISO 3834-2; EN 1090-1; ISO 668; ISO 1161; AQAP 2110

EXPLOITATION PERIOD

20-25 years

E-mail: telegrupp@telegrupp.ee