





Aru patio PARALLEL 68 Softline Lift&slide opening wooden terrace door

- Made to measure Sizes
- Sliding door leaf inside
- Jamb width 164 mm
- Sash profile thickness 68 mm
- Frame and sash material - pine or oak
- Threshold - hardwood, outer step is covered with aluminium profile
- Timber finishing with waterbased paint or stain. Paint according to RAL color chart, stain according to manufacturer's samples
- Double glazed standard glass thickness 24 mm, $U_g \geq 1,0W/m^2K$
 Triple glass thickness 32 mm, $U_g \geq 0,78W/m^2K$
- Glazing bar options:
 1. Glued on both sides of the glass (Georgian style)
 2. Glued on both sides of the glass+slats inside the glazing (Norwegian style) - possible with double glass only
 3. dekorative bars inside the glazing


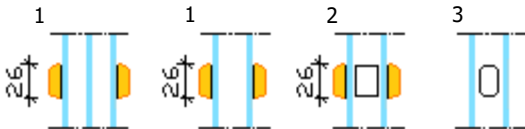


- Standard locking system:
 latch with bolts, handle inside and finger pull outside

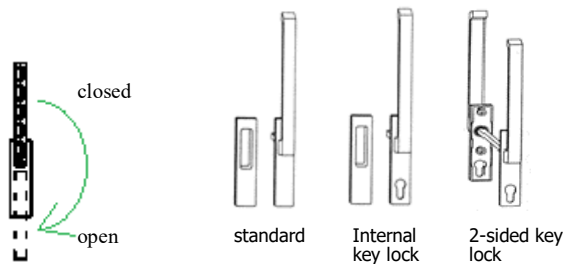

- Extras:
 - Different handle styles
 - Internal key lock (Euro DIN),
 - 2-sided key lock (Euro DIN),
 - Jamb extensions
 - Jamb with grooves 10x10 mm
 - Special glasses (toughened, laminated, sun protection, self cleaning etc)

- Sash weight max 300 kg
- Sash height/width ratio <2,5
- Sash width 700...3000 mm
- Sash height 1825...2750 mm

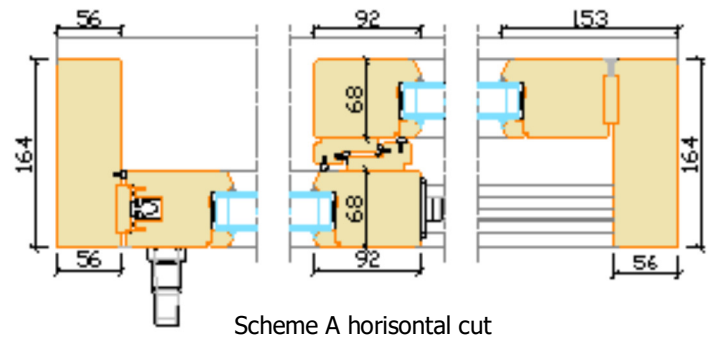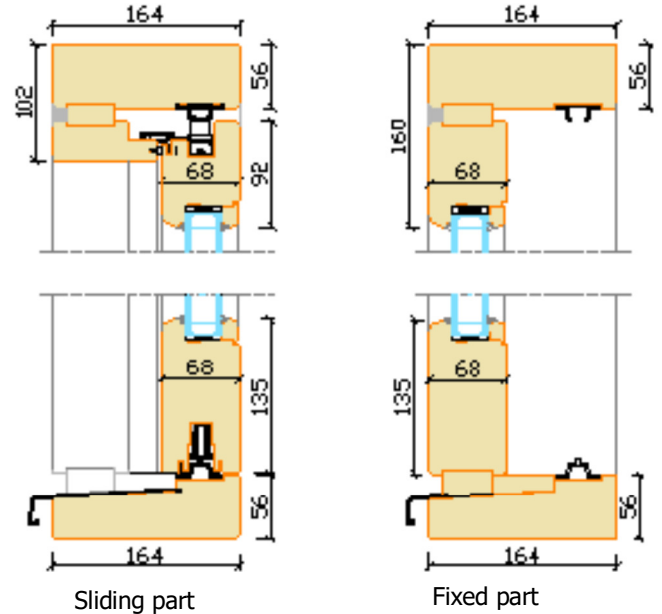

OPENING SCHEMES viewed from inside

