

TECHNICAL DATA E-PRO ECONOMY DROP-IN UNITS

Drop-in neutral and refrigerated water dispenser



The E-Pro drop-in unit range offers all the equipment needed for a complete and effective self-service line. The capacity, materials and technical features of the water dispensers are designed to meet the requirements of professional kitchens.



GENERAL

- E-Pro drop-in water dispensers are designed for dispensing drinking water on a self-service line
- Drop-in water dispensers are equipped with a mechanical tap
- Equipped with a water bowl and crate
- The water dispenser can be installed without the refrigeration unit, in which case it is connected directly to the water supply network

PERFORMANCE

(models with refrigeration unit)

- Maximum cooled water yield 45 litres, and continuous 9 litres per hour
- Cooled water temperature between +3 and +10°C
- Ice bank ensures the availability of cooled drinking water in continuous use


TECHNICAL FEATURES

- CFC and HCFC free
- Refrigerant R134
- Equipped with 2,0m long power cord
- All E-Pro drop-in units are CE marked





Drop-in refrigerated water dispenser

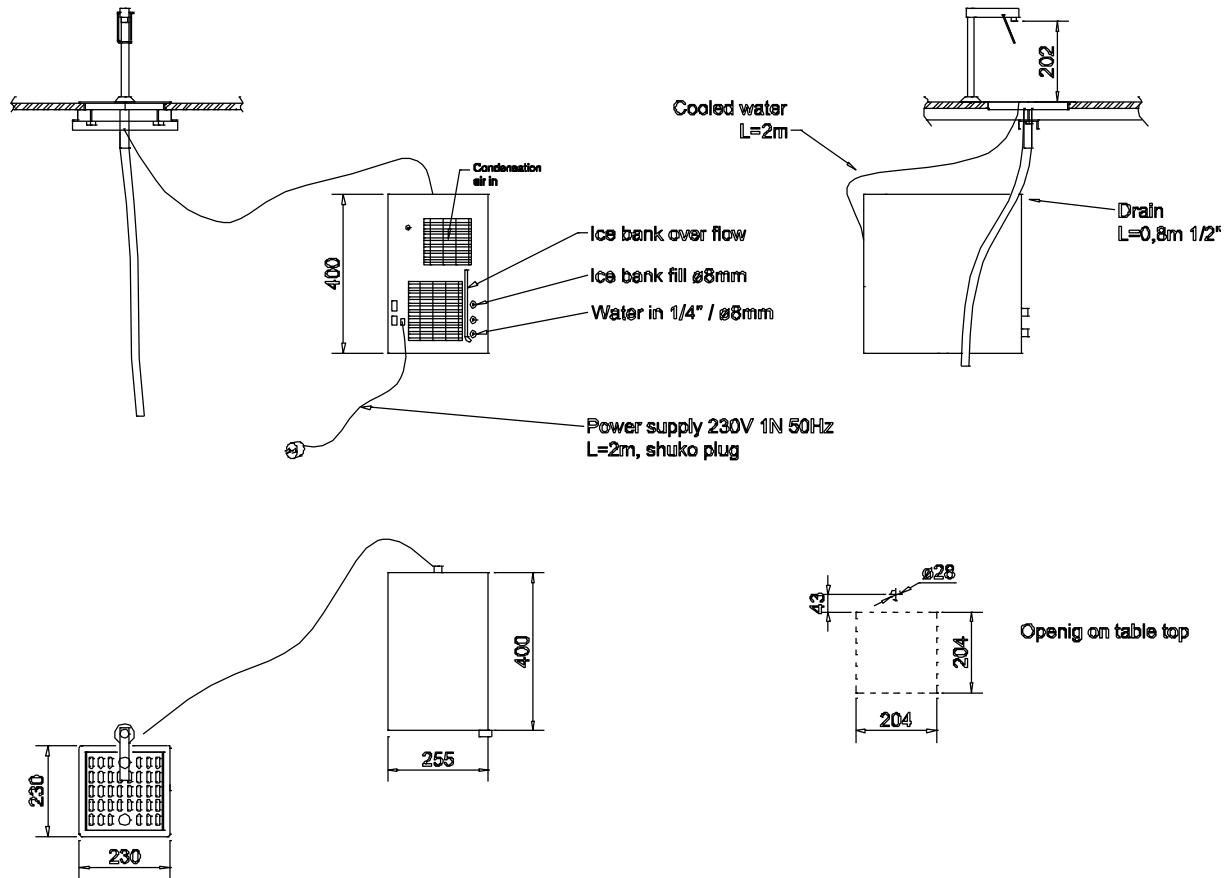





TECHNICAL DATA	
Model	EC D-I 0200
Mechanical tap pcs	1
Water yield l/h	45
Water yield in continuous use l/h	9
Ice bank 4.5kg	included
Temperature range °C	+3...+10
Type refrigerant, g	R134, n/a
Electrical connection V, Hz	230 1N, 50
Connected load W	180
Net weight kg	25
Unit volume m ³	0,2
Unit dimensions mm	
height	600
depth	500
width	350

Due to continuous product development we reserve the right to technical changes without notice.





Drop-in neutral water dispenser

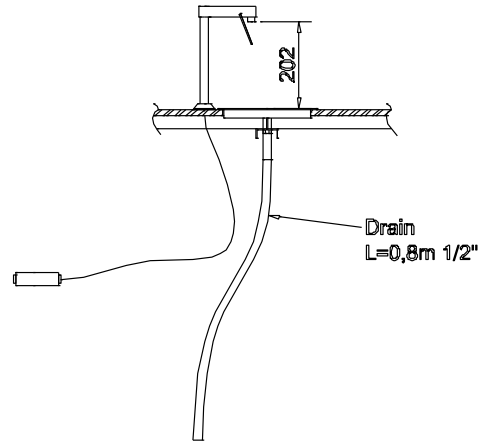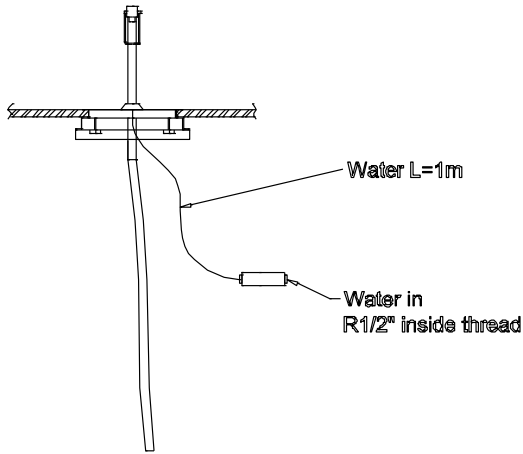

Openig on table top

TECHNICAL DATA	
Model	EC D-I 0260
Mechanical tap pcs	1
Net weight kg	2
Unit volume m ³	0,1
Unit dimensions mm	
height	300
depth	500
width	500

Due to continuous product development we reserve the right to technical changes without notice.

