

TECHNICAL DATA E-PRO ECONOMY COLD UNITS



Refrigerated cold well

The E-Pro range of cold units includes various types of refrigerated units and worktops. Thanks to the flexible modular construction, they are easy to combine to create a customised food service system that best suits personal requirements. All units are made of stainless steel and comply with the hygiene standards for professional kitchens.



GENERAL

- Products are designed for the short-term storage and serving of cold foods
- All surfaces are made of stainless steel
- Ø63.5mm adjustable feet, with a height adjustment range of -40/+20mm
- GN-sized cupboard
- Removable slide rails and PVC plastic magnetic gaskets
- GN1/1 dividers as standard option

PERFORMANCE

- The technical features of products are designed to meet the requirements of cold storage in +30°C ambient temperature. The capacity is verified by laboratory experiments
- The temperature can be adjusted between +4 and +6°C. Temperature is +4 to +12°C in cold well
- The thermostat control includes a digital temperature display
- The ventilated refrigeration module guarantees even temperature distribution

TECHNICAL FEATURES


- The units have 42mm thick walls, insulating material polyurethane
- CFC and HCFC free
- The refrigerant is R134a
- The refrigeration module is removable without tools and comes with automatic defrost and evaporation of defrost water
- HACCP option is available for all models
- All E-Pro cold units are CE marked





Refrigerated cold well

- Temperature range: **+4...+6°C** (maximun ambient temperature of +30 °C in cold storage)
- Refrigerator modules: **C1**
- Unit modules: **1**

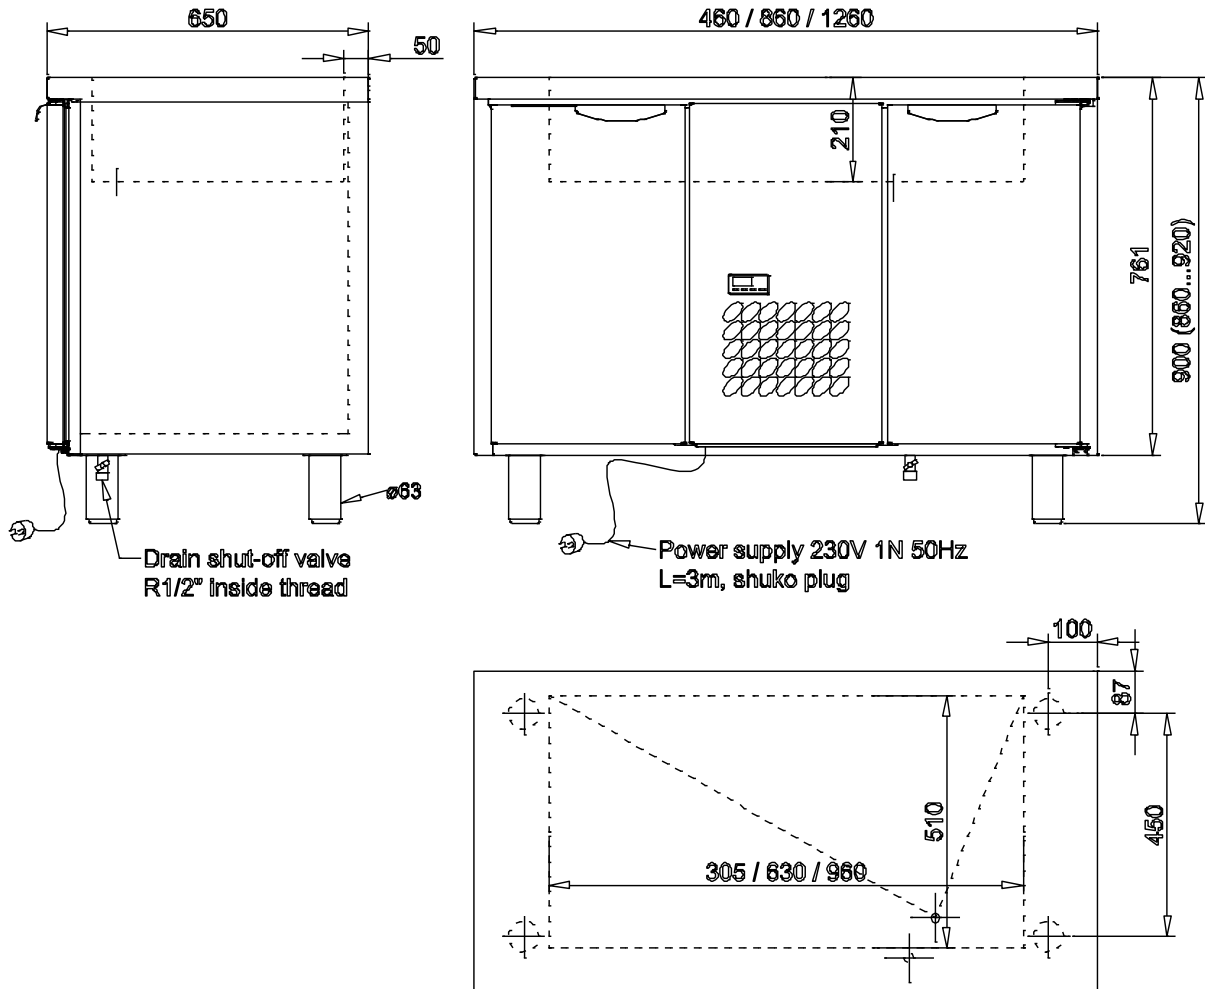

TECHNICAL DATA			
Model	ECGNS-C1	ECGNS-1-C1	ECGNS-1-C1-1
External dimensions w x d x h mm	460x650x900	860x650x900	1260x650x900
Temperature range °C	+4...+6	+4...+6	+4...+6
Internal volume dm ³	92	182	292
Type of refrigerant, g	R134a, 300	R134a, 300	R134a, 300
Electrical connection V, Hz	230 1N, 50	230 1N, 50	230 1N, 50
Connected load W	350	350	750
Enclosure class	IP44	IP44	IP44
Net weight kg	62	94	131
HACCP option	included	included	included
Unit volume m ³	0,4	0,7	1,0
Unit dimensions mm			
height	1050	1050	1050
depth	750	750	750
width	500	900	1300


Due to continuous product development we reserve the right to technical changes without notice.



MODULES

Refrigerator modules


- C1** Refrigerator module 350W without drawer, temperature range +4...+6°C



C1

Unit modules

- 1** Cupboard with a closed door, removable shelf and four pairs of removable shelf brackets

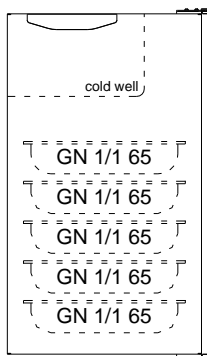

1