

TECHNICAL DATA E-PRO ECONOMY COLD UNITS



Refrigerated display

The range of E-Pro cold units includes various types of refrigerated units and worktops. Thanks to the flexible modular construction, they are easy to combine to create a customised food service system that best suits your particular requirements. All units are made of stainless steel and comply with the hygiene standards for professional kitchens.



GENERAL

- Products are designed for the short-term storage and serving of cold foods
- All surfaces are made of stainless steel
- Ø63.5mm adjustable feet, with a height adjustment range of -40/+20mm
- GN-sized cupboards, drawers and wells
- Removable PVC plastic magnetic gaskets
- Cold well feature GN-sized adjustable and tilt able grills

PERFORMANCE

- The technical features of products are designed to meet the requirements of cold storage in +25°C ambient temperature. The capacity is verified by laboratory experiments
- The temperature can be adjusted between +4 and +15°C. Temperature is +6 to +17°C in display case.
- Digital temperature display
- The ventilated refrigeration in the display case and cupboard guarantees even temperature distribution
- Powerful LED lights with no extra heat included.

TECHNICAL FEATURES


- The units have 42mm thick walls, insulating material polyurethane
- CFC and HCFC free
- The refrigerant is R134a
- The refrigeration module is removable without tools and comes with automatic defrost and evaporation of defrost water
- The glass display case is made of acryl plastic with rounded corners
- HACCP option is available for all models
- All E-Pro cold units are CE marked





Refrigerated display

- Temperature range: **+4...+15°C** (maximum ambient temperature of +25 °C in cold storage)
- Refrigerator modules: **CH1**
- Unit modules: **1**

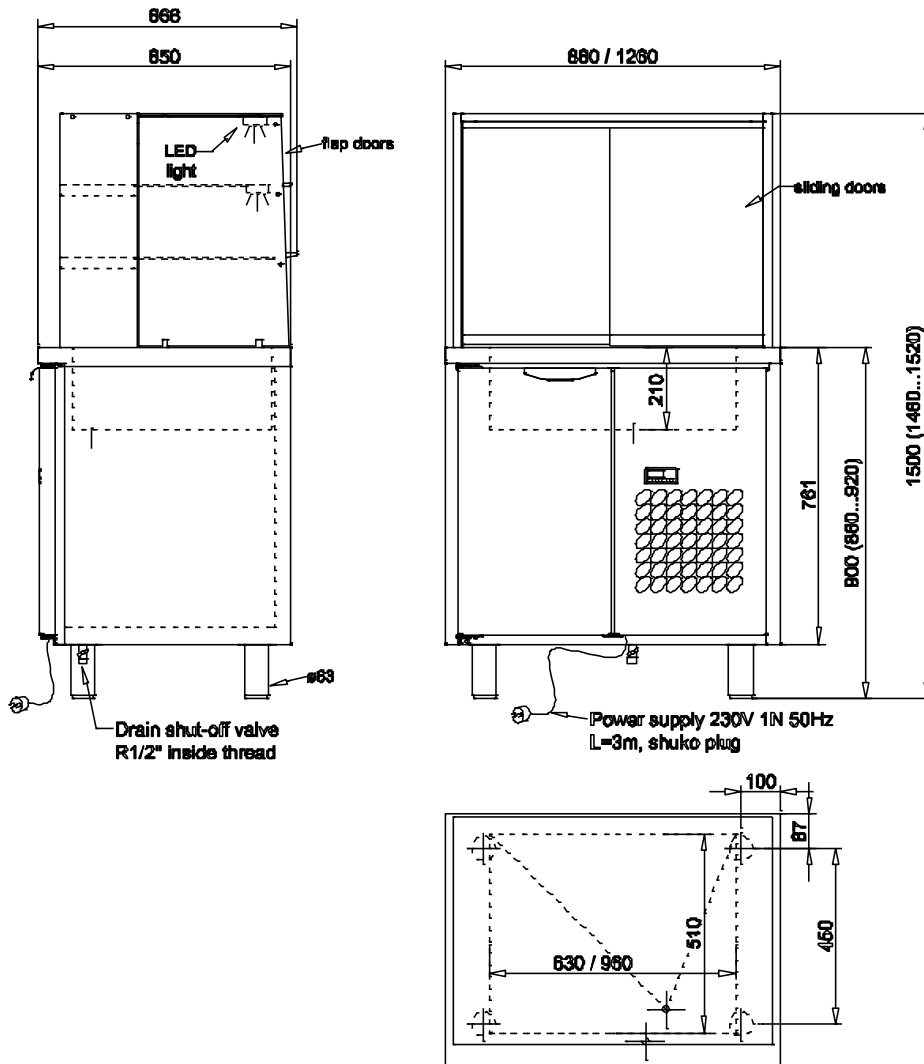

TECHNICAL DATA		
Model	ECD-1-CH1	ECD-1-CH1-1
External dimensions w x d x h mm	860x650x1500	1260x650x1500
Temperature range cupboard (cold well and display case) °C	+4...+15 (+6...+17)	+4...+15 (+6...+17)
Internal volume dm ³	532	824
Type of refrigerant g	R134a, 300	R134a, 300
Electrical connection V, Hz	230 1N, 50	230 1N, 50
Connected load W	770	780
Enclosure class	IP44	IP44
Net weight kg	114	148
HACCP option	included	included
Unit volume m ³	1.1	1.6
Unit dimensions mm		
height	1650	1650
depth	750	750
width	900	1300


Due to continuous product development we reserve the right to technical changes without notice.



MODULES

Refrigerator modules


CH1 Refrigerator module 750W without drawer, temperature range +4...+15°C



CH1

Unit modules

1 Cupboard with a closed door, removable shelf and four pairs of removable shelf brackets



1