

TECHNICAL DATA E-PRO ECONOMY COLD UNITS



Refrigerated drawer / cabinet

The E-Pro range of cold units includes various types of refrigerated units and worktops. Thanks to the flexible modular construction, they are easy to combine to create a customised food service system that best suits personal requirements. All units are made of stainless steel and comply with the hygiene standards for professional kitchens.



GENERAL

- Products are designed for the short-term storage of cold foods
- All surfaces are made of stainless steel
- Ø63.5mm adjustable feet, with a height adjustment range of -40/+20mm
- GN-sized cupboards and drawers
- Removable slide rails and PVC plastic magnetic gaskets

PERFORMANCE

- The technical features of products are designed to meet the requirements of cold storage in +30°C ambient temperature. The capacity is verified by laboratory experiments
- The temperature can be adjusted between +2 and +6°C
- The thermostat control includes a digital temperature display
- The ventilated refrigeration module guarantees even temperature distribution

TECHNICAL FEATURES


- The units have 42mm thick walls, insulating material polyurethane
- CFC and HCFC free
- Refrigerant is R134a
- The refrigeration module is removable without tools and comes with automatic defrost and evaporation of defrost water
- HACCP option available for all models
- All E-Pro cold units are CE marked





Refrigerated drawer / cabinet

- Temperature range **+2...+6°C** (maximum ambient temperature of +30 °C in cold storage)
- Refrigerator modules: **C1, C2**
- Unit modules: **1, 2, 3**

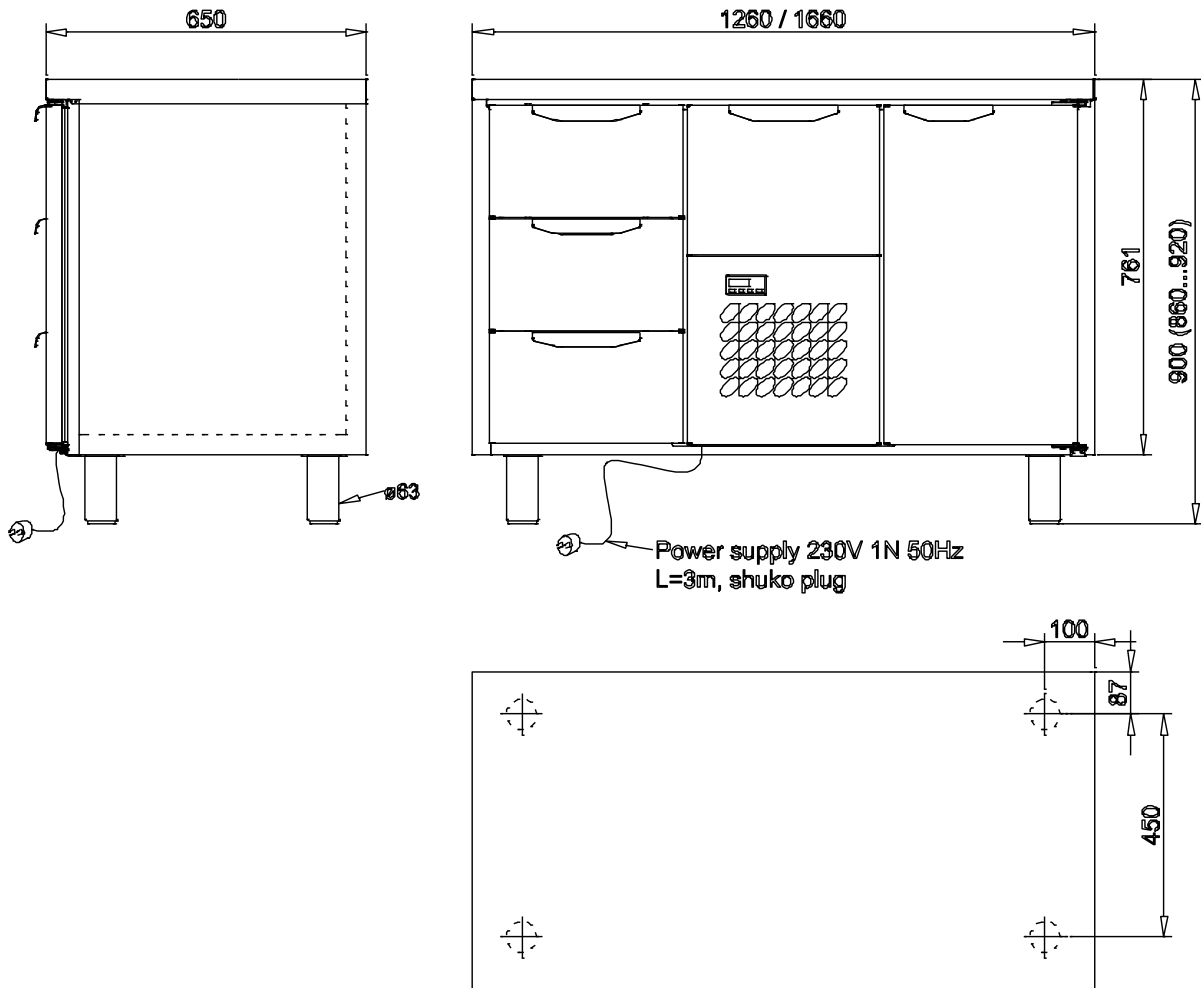

| TECHNICAL DATA | | | | |
|----------------------------------|--------------|--------------|---------------|---------------|
| Model | ECGN-3-C2-3 | ECGN-1-C1-1 | ECGN-3-C2-3-3 | ECGN-1-C1-1-1 |
| External dimensions w x d x h mm | 1260x650x900 | 1260x650x900 | 1660x650x900 | 1660x650x900 |
| Temperature range °C | +2...+6 | +2...+6 | +2...+6 | +2...+6 |
| Internal volume dm ³ | 392 | 392 | 542 | 542 |
| Type of refrigerant, g | R134a, 300 | R134a, 300 | R134a, 300 | R134a, 300 |
| Electrical connection V, Hz | 230 1N, 50 | 230 1N, 50 | 230 1N, 50 | 230 1N, 50 |
| Connected load W | 350 | 350 | 350 | 350 |
| Enclosure class | IP44 | IP44 | IP44 | IP44 |
| Net weight kg | 120 | 120 | 150 | 150 |
| HACCP option | included | included | included | included |
| Unit volume m ³ | 1,0 | 1,0 | 1,3 | 1,3 |
| Unit dimensions mm | | | | |
| height | 1050 | 1050 | 1050 | 1050 |
| depth | 750 | 750 | 750 | 750 |
| width | 1300 | 1300 | 1700 | 1700 |


Due to continuous product development we reserve the right to technical changes without notice.



MODULES

Refrigerator modules CDGN serie

- C1** Refrigerator module 350W without drawer, temperature range +2...+6°C
- C2** Refrigerator module 350W with a drawer for GN 1/1 200mm container. S/s box for bottle crate as an accessory, temperature range +2...+15°C.

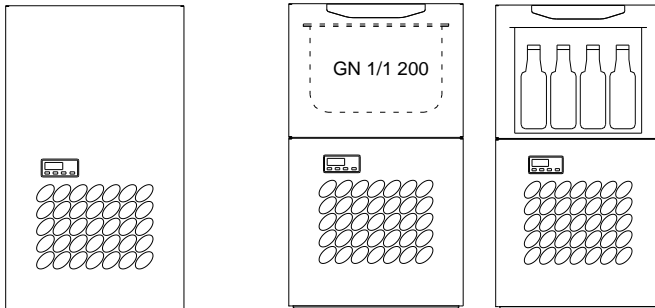


C1

C2

Unit modules CDGN serie

- 1** Cupboard with a closed door, removable shelf and four pairs of removable shelf brackets
- 2** 2 drawers for GN 1/1 200mm containers. S/s box for bottle crate as an accessory.
- 3** 3 drawers for GN 1/1 150mm containers

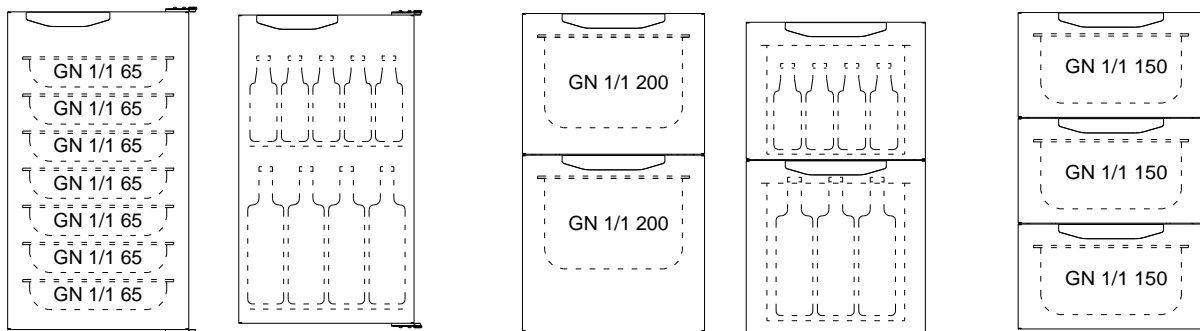

1

2

3