

## TECHNICAL DATA E-PRO COLD UNITS

### Refrigerated display

The range of E-Pro cold units includes various types of refrigerated units and worktops. Thanks to the flexible modular construction, they are easy to combine to create a customised food service system that best suits your particular requirements. All units are made of stainless steel and comply with the hygiene standards for professional kitchens.



#### GENERAL

- Products are designed for the short-term storage and serving of cold food
- All surfaces are made of stainless steel
- Ø63.5mm adjustable feet, with a height adjustment range of -40/+20mm
- GN-sized cupboards and wells
- Removable PVC plastic magnetic gaskets
- The refrigerated wells have hygienic rounded corners
- Cold well feature GN-sized adjustable and tilt able grills

#### PERFORMANCE

- The technical features of products are designed to meet the requirements of cold storage in +25°C ambient temperature. The capacity is verified by laboratory experiments
- The temperature can be adjusted between +4 and +15°C. Temperature is +6 to +17°C in display case and individually controlled on each shelf
- Digital temperature display
- The ventilated refrigeration in the glass display case and cupboard guarantees even temperature distribution
- Powerful LED lights with no extra heat included.


#### TECHNICAL FEATURES

- The units have 42mm thick walls, insulating material polyurethane
- CFC and HCFC free
- The refrigerant is R134a
- The refrigeration module is removable without tools and comes with automatic defrost and evaporation of defrost water
- The glass display case is made of safety glass and acryl plastic with rounded corners
- The refrigeration module features an automatic alarm of air-intake filters dirtiness option
- HACCP option is available for all models
- All E-Pro cold units are CE marked



# Refrigerated display, CDDL serie

- Temperature range: **+4...+15°C** (maximum ambient temperature of +25 °C in cold storage)
- Refrigerator modules: **CH1**
- Unit modules: **1**

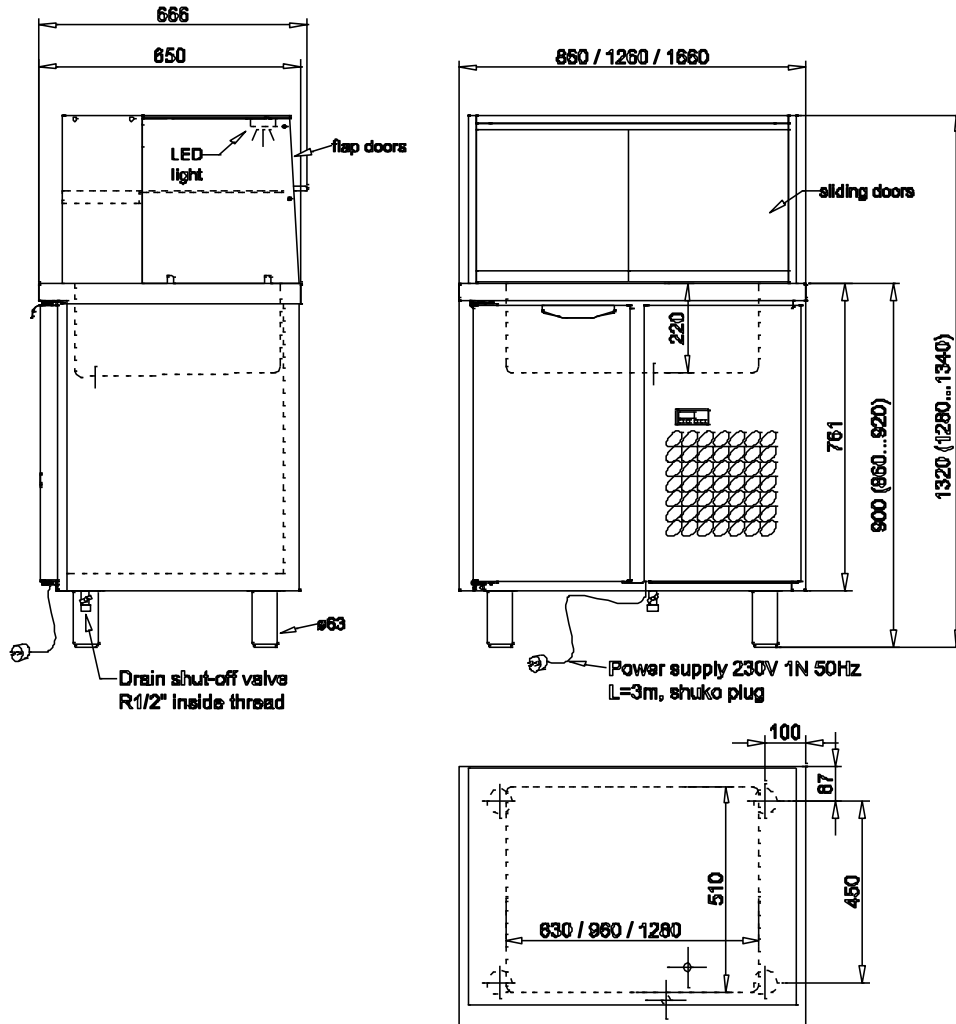


TECHNICAL DATA			
Model	CDDL-1-CH1	CDDL-1-CH1-1	CDDL-1-CH1-1-1
External dimensions w x d x h mm	860x650x1320	1260x650x1320	1660x650x1320
Temperature range cupboard (cold well and display case) °C	+4...+15 (+6...+17)	+4...+15 (+6...+17)	+4...+15 (+6...+17)
Internal volume dm <sup>3</sup>	446	694	945
Type of refrigerant g	R134a, 300	R134a, 300	R134a, 300
Electrical connection V, Hz	230 1N, 50	230 1N, 50	230 1N, 50
Connected load W	760	765	770
Enclosure class	IP44	IP44	IP44
Net weight kg	104	136	169
HACCP option	included	included	included
Unit volume m <sup>3</sup>	1.0	1.4	1.9
Unit dimensions mm			
height	1500	1500	1500
depth	750	750	750
width	900	1300	1700

Due to continuous product development we reserve the right to technical changes without notice.



# Refrigerated display, CDD serie

- Temperature range: **+4...+15°C** (maximum ambient temperature of +25 °C in cold storage)
- Refrigerator modules: **CH1**
- Unit modules: **1**

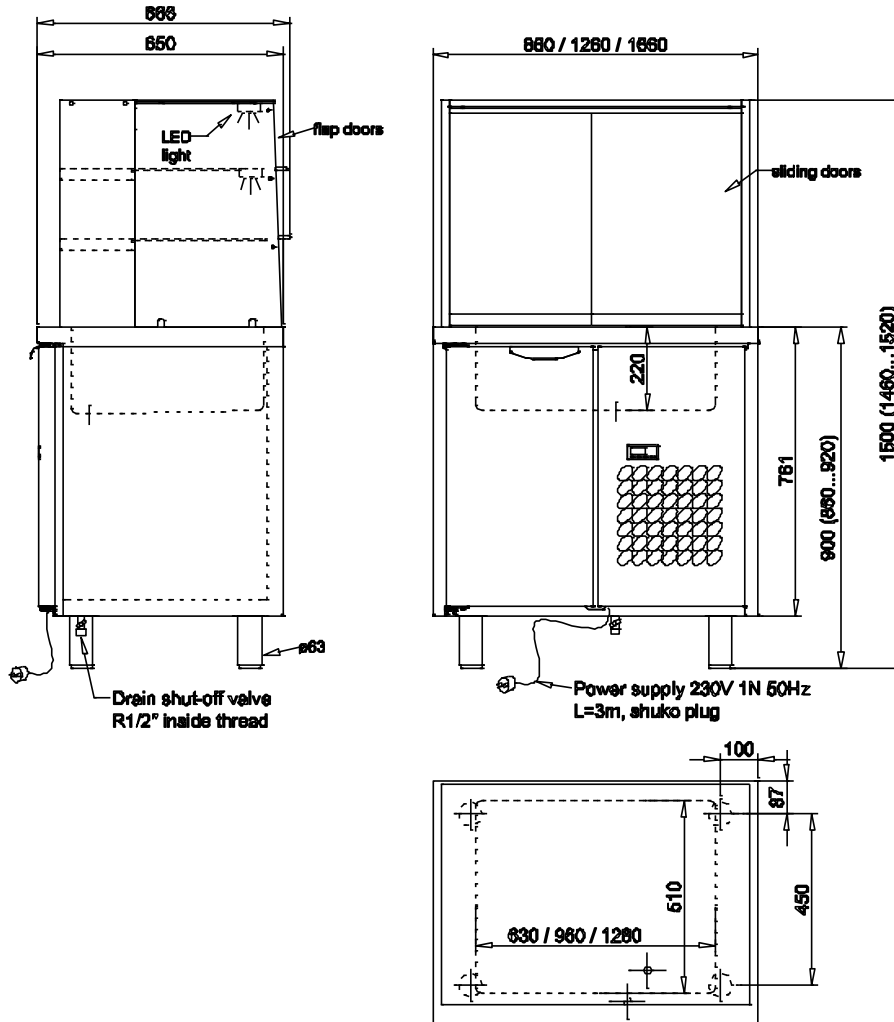


TECHNICAL DATA			
Model	CDD-1-CH1	CDD-1-CH1-1	CDD-1-CH1-1-1
External dimensions w x d x h mm	860x650x1500	1260x650x1500	1660x650x1500
Temperature range cupboard (cold well and display case) °C	+4...+15 (+6...+17)	+4...+15 (+6...+17)	+4...+15 (+6...+17)
Internal volume dm <sup>3</sup>	532	824	1118
Type of refrigerant g	R134a, 300	R134a, 300	R134a, 300
Electrical connection V, Hz	230 1N, 50	230 1N, 50	230 1N, 50
Connected load W	770	780	790
Enclosure class	IP44	IP44	IP44
Net weight kg	114	148	183
HACCP option	included	included	included
Unit volume m <sup>3</sup>	1.1	1.6	2.1
Unit dimensions mm			
height	1650	1650	1650
depth	750	750	750
width	900	1300	1700

Due to continuous product development we reserve the right to technical changes without notice.



# Refrigerated display, CDDH serie

- Temperature range **+4...+15°C**, highest shelf neutral (maximun ambient temperature of +25 °C in cold storage)
- Refrigerator modules: **CH1**
- Unit modules: **1**

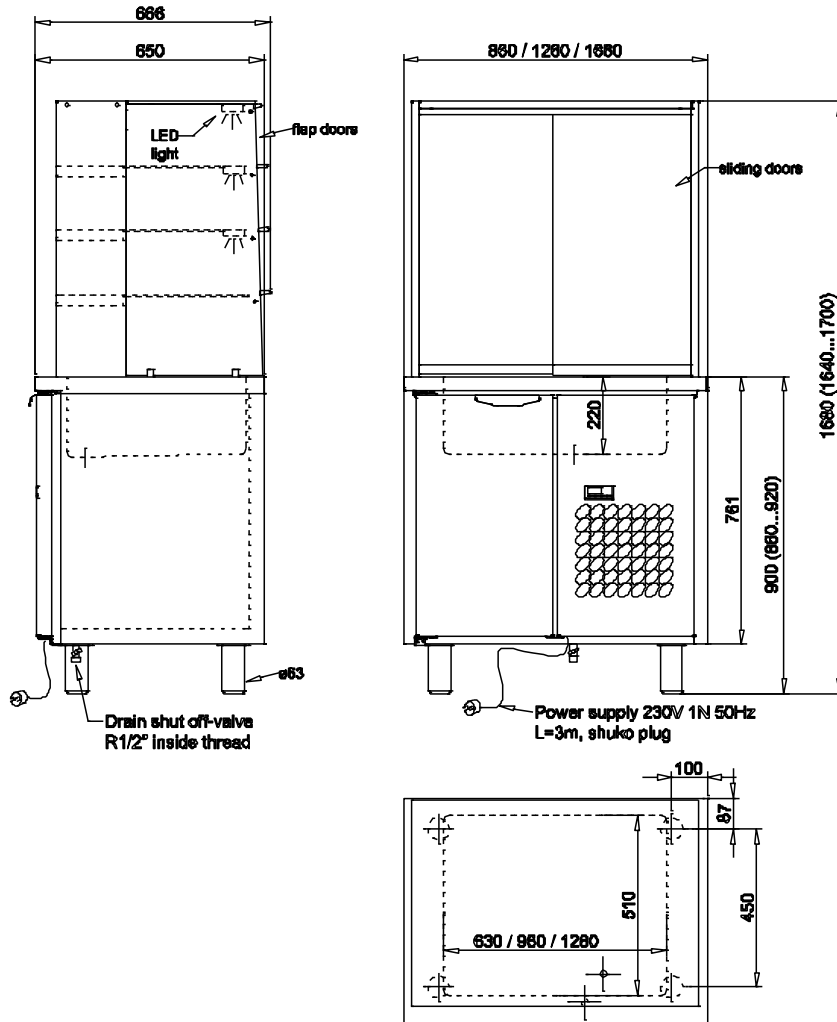


TECHNICAL DATA			
Model	CDDH-1-CH1	CDDH-1-CH1-1	CDDH-1-CH1-1-1
External dimensions w x d x h mm	860x650x1680	1260x650x1680	1660x650x1680
Temperature range cupboard (cold well and display case) °C	+4...+15 (+6...+17)	+4...+15 (+6...+17)	+4...+15 (+6...+17)
Internal volume dm <sup>3</sup>	618	954	1291
Type of refrigerant g	R134a, 300	R134a, 300	R134a, 300
Electrical connection V, Hz	230 1N, 50	230 1N, 50	230 1N, 50
Connected load W	780	795	810
Enclosure class	IP44	IP44	IP44
Net weight kg	114	148	183
HACCP option	included	included	included
Unit volume m <sup>3</sup>	1.3	1.8	2.4
Unit dimensions mm			
height	1850	1850	1850
depth	750	750	750
width	900	1300	1700

Due to continuous product development we reserve the right to technical changes without notice.



**Refrigerator modules**


**CH1** Refrigerator module 750W without drawer, temperature range +4...+15°C



**CH1**

**Unit modules**

**1** Cupboard with a closed door, two removable shelves and four pairs of removable shelf brackets



**1**