

# TECHNICAL DATA E-PRO TRANSPORT TROLLEYS

## Heated transport trolley

The E-Pro transport trolley system offers solutions for the transport and short-term storage of foods before distribution or regeneration. The system includes refrigerated, heated and neutral models of different sizes, which are compatible with Gastronorm food containers. The materials and technical and hygienic features of the transport trolleys are designed to meet the highest requirements of professional kitchens.



### GENERAL

- E-Pro hot transport trolleys are designed for the short-term transport and storage of hot foods
- Large 150mm rubber-coated wheels guarantee good mobility
- The plastic impact shield around the unit protects it from dents
- Removable heating unit and to trolleys side wall locking door enables machine wash
- The watertight interior has bevelled and easy-to-clean inside corners

### PERFORMANCE


- The temperature can be adjusted between +30 and +85°C. Verified by laboratory experiments
- The removable and machine washable guide bars are compatible with GN 1/1 containers
- Maintains food temperature hot for a long time also without power supply
- Reliable analog temperature display operates without electricity
- The air circulation fan guarantees even temperature distribution within the unit
- The ventilation valve prevents condensing

### TECHNICAL FEATURES

- Door opening angle 270°
- The units have 32mm thick walls, insulating material polyurethane
- Fitted with a durable 2m spiral cable
- The locking latch with chain and cotter pin keeps the door closed during transport
- Heating unit and resistor material stainless steel
- Heating unit is easily dismountable for cleaning
- All E-Pro units are CE marked



# Heated transport trolley, TTH serie

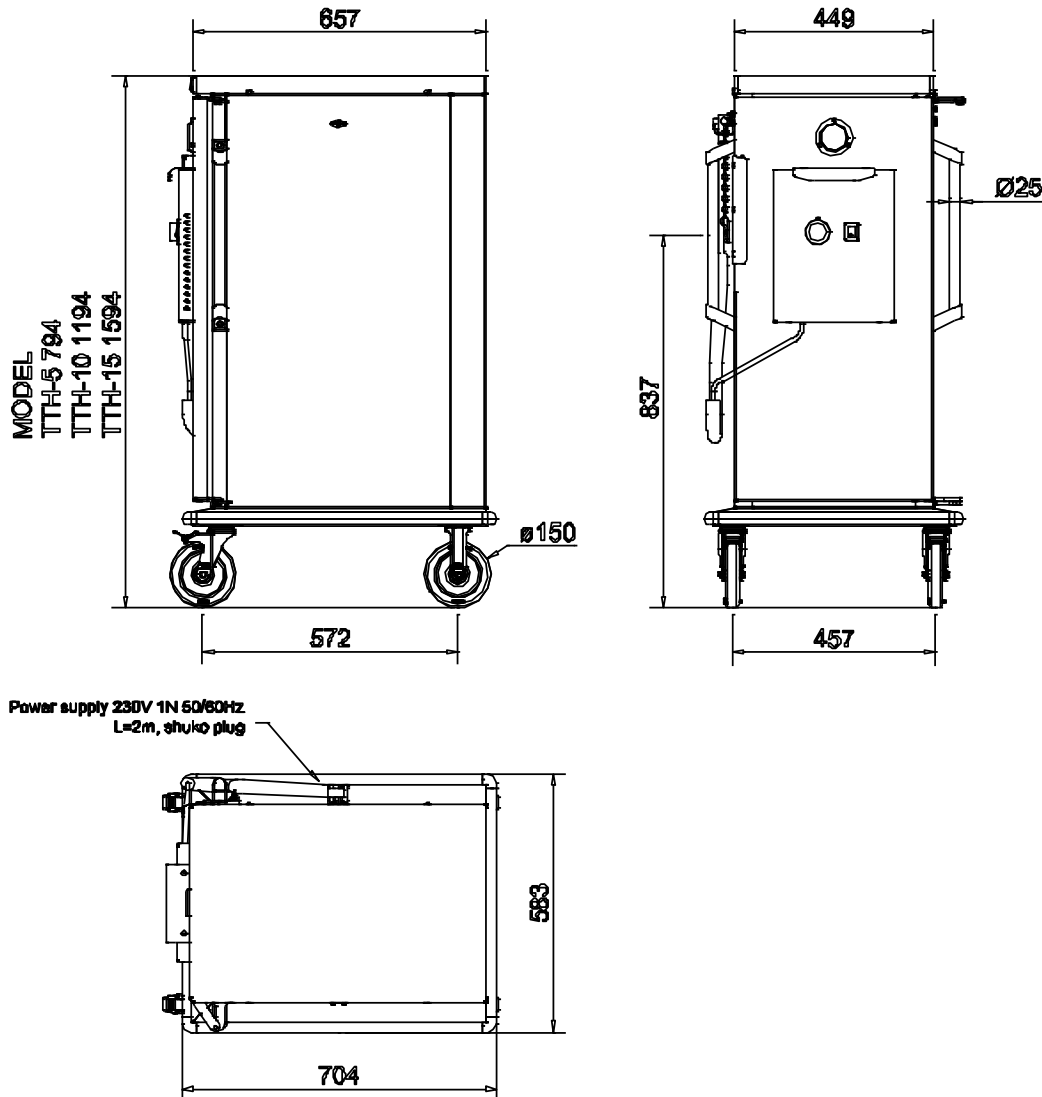

TECHNICAL DATA			
Model	TTH-5	TTH-10	TTH-15
External dimensions w x d x h mm	583x704x794	583x704x1194	583x704x1594
A lid and opening for a GN container on top	-	-	-
Temperature range °C	+30...+85	+30...+85	+30...+85
Guide bars no.	5	10	15
Guide bar distance mm	80	80	80
Capacity for GN 1/1 65 containers no.	5	10	15
Wheels	∅150mm, 2 fixed, 2 rotating wheels with brakes	∅150mm, 2 fixed, 2 rotating wheels with brakes	∅150mm, 2 fixed, 2 rotating wheels with brakes
Electrical connection V, Hz	230 1N 50/60	230 1N 50/60	230 1N 50/60
Connected load kW	0,43	0,43	0,43
Enclosure class	IP41	IP41	IP41
Net weight kg	46	57	63
Unit volume m <sup>3</sup>	0,6	0,7	1,0
Unit dimensions mm			
width	600	600	600
depth	720	720	720
height	950	1350	1750

Due to continuous product development we reserve the right to technical changes without notice.

