

TECHNICAL DATA E-PRO TRANSPORT TROLLEYS

Refrigerated battery secured transport trolleys



The E-Pro transport trolley system offers solutions for the transport and short-term storage of foods before distribution or regeneration. The system includes refrigerated, heated and neutral models of different sizes, which are compatible with Gastronorm food containers. The materials and technical and hygienic features of the transport trolleys are designed to meet the highest requirements of professional kitchens.



GENERAL

- Products are designed for the short-term storage and transporting of cold foods
- Large 150mm rubber-coated wheels guarantee good mobility
- The plastic impact shield around the unit protects it from dents
- The watertight interior has bevelled and easy-to-clean inside corners
- Maintains food temperature cold for a long time also without power supply and with the refrigerating machine switched off

PERFORMANCE

- After the trolley is unplugged from the electric network, the refrigeration operates for hours with batteries. The cold chain is not interrupted at any phase.
- The technical features of products are designed to meet the requirements of cold storage and transport in maximum of +28°C ambient temperature. The capacity is verified by laboratory experiments
- Digital temperature display and control
- The temperature can be set between +2...+15°C
- The ventilated refrigeration, even temperature distribution


TECHNICAL FEATURES

- Door opening angle 270°
- The units have 32mm thick walls, insulating material polyurethane
- Fitted with a durable 2m spiral cable
- Removable and water washable condensating air filter
- The locking latch with chain and cotter pin keeps the door closed during transport
- The refrigerating machine provides efficient refrigeration
- Vibration and fall resistant gelled-electrolyte battery
- CFC and HCFC free
- The refrigerant is R404
- All E-Pro units are CE marked



Refrigerated battery secured transport trolley,

TTCB serie

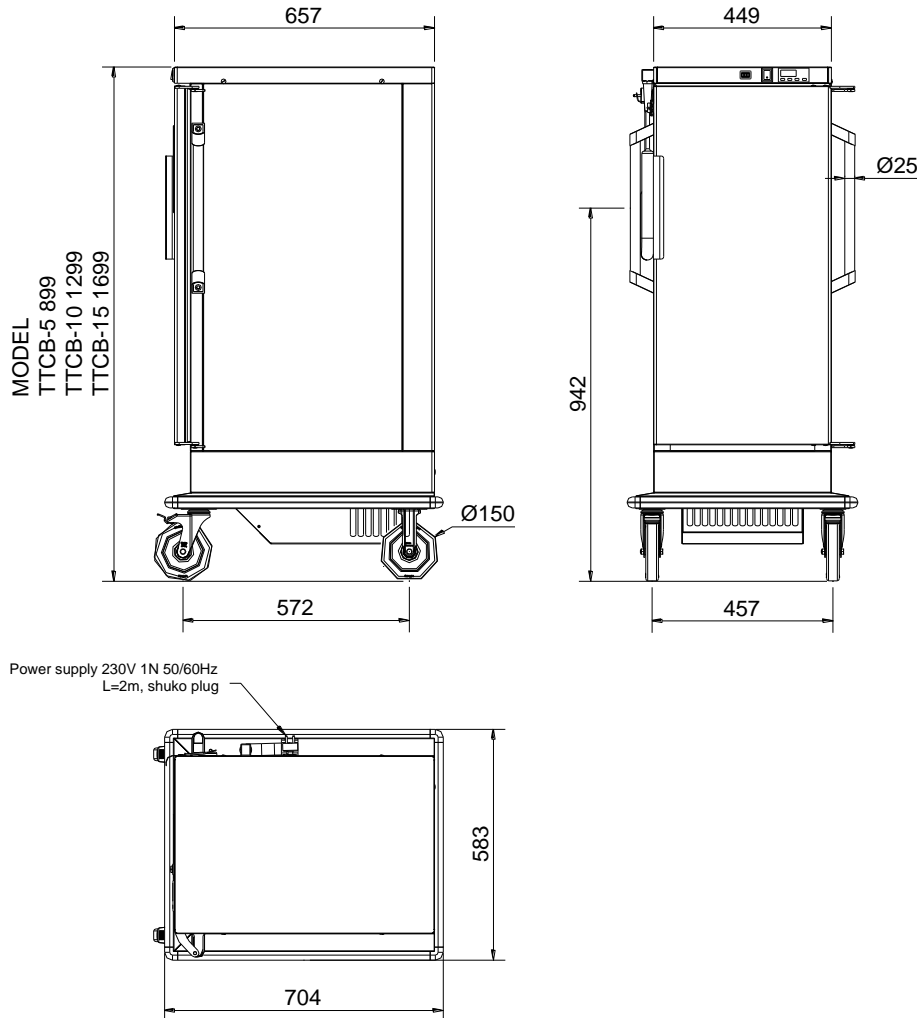

TECHNICAL DATA			
Model	TTCB-5	TTCB-10	TTCB-15
External dimensions w x d x h mm	583x704x899	583x704x1299	583x704x1699
Temperature range °C	+2...+15	+2...+15	+2...+15
Battery secured refrigerator	yes	yes	yes
Operating time battery drivenly h (in ambient temperature of 25°C)	3...6	3...6	3...6
Guide bars no.	5	10	15
Guide bar distance mm	80	80	80
Capacity for GN 1/1 65 containers no.	5	10	15
Wheels	Ø150mm, 2 fixed, 2 rotating wheels with brakes	Ø150mm, 2 fixed, 2 rotating wheels with brakes	Ø150mm, 2 fixed, 2 rotating wheels with brakes
Electrical connection V, Hz	230 1N 50/60	230 1N 50/60	230 1N 50/60
Connected load W	275	275	275
Enclosure class	IP44	IP44	IP44
Type of refrigerant, g	R134a, n/a	R134a, 160	R134a, n/a
Net weight kg	78	89	95
Dimensions mm	0,7	0,8	1,1
Unit dimensions mm			
width	600	600	600
depth	720	720	720
height	1100	1500	1900

Due to continuous product development we reserve the right to technical changes without notice.

