


AT-2151HD (HIGH BRIGHTNESS AT 1000-1200CD)

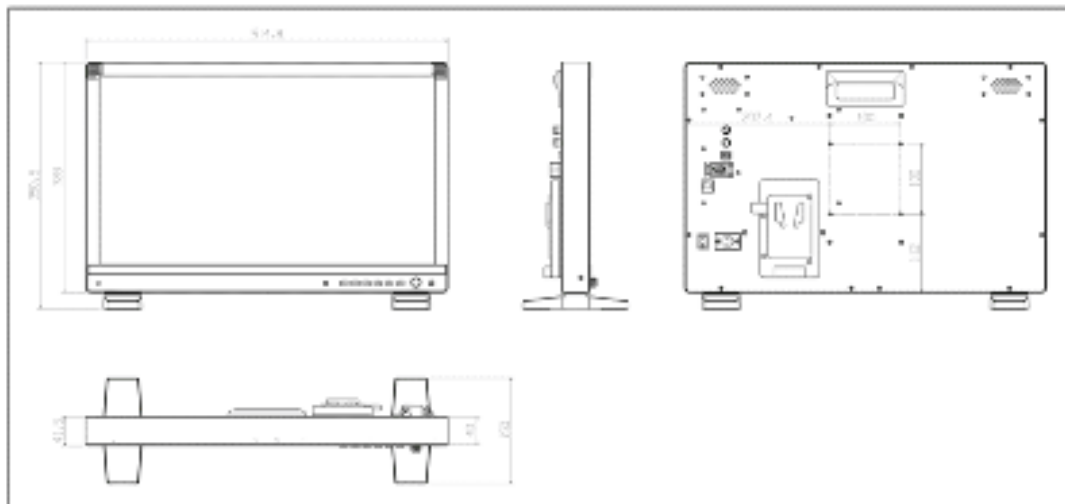

FUNCTION	EMBEDDED 3D-LUT, Brightness W/F, FAULSE COLOR, ZEBRA, AUDIO METER, MARKS, ASPECT RATIO, MONO-CHROM SWITCH, OVERSCAN, GPI CONTROL INTELLIGENT LIGHT PERCEPTION		
SIZE	21.5'	RESOLUTION	1920*1080
DOT PITCH	0.247H*0.247V	ASPECT RATIO	16:9/4:3
COLORS	16.7M	IMAGE PROCESSING	10 BITS
RESPONSE TIME	7MS	VIEW ANGLE	H178/V178
BRIGHTNESS	1200cd		

VIDEO IN	3G/HD/SD-SDI	BNC*2
	HDMI	HDMI 1.3*1
VIDEO OUT	3G/HD/SD-SDI	BNC*1

#### SDI INPUT FORMATS

425M(3G-SDI)	1080p(50/60)
274M(HD)	1080i(60/59.94/50) 1080p(30/29.97/25/24/24sF/23.98/23.98sF)
295M(HD)	720p(60/59.94/50/30/29/25/24/23.98)
259M(SD)	480i/59.94i、576/50i

<b>HDMI</b>	480p/60、480i/60、576i/50、576p/50、720p/50/60、1080i/50/60、1080p/24/25/30/50/60
-------------	---

<b>Operation requirement</b>	Input voltage	DC 12V
	Power consumption	35W
	Working temperature	0-40℃
	Store temperature	-20-60℃
	Store humidity	0%-90% no condensation

<b>Structure</b>	Shell material	Aluminum profile
	Dimension (mm)	514.8x328x40mm
	Weight	Around 5kg
	Fixing method	Desktop or VESA
	VESA size	100*100mm

Additional Armor case for outdoor shooting





