



Aru patio PARELLEL 88 INOWA EX Outward opening wooden sliding door/window

- Tightly sealed sliding system with smart hardware even in stormy weather
- Circumferential gasket and active control of all locking points including in the mullion.
- Convenient and simple operation which requires little force thanks to innovative closing movement perpendicular to the frame profile
- Harmonious design thanks to concealed technology
- Can be extended with Soft functions which protect the entire sliding element from the sash slamming uncontrollably against the frame. They do so by mechanically braking the movement of the sash when opening and closing.




To open the door, the handle must be turned up and then the door can be pushed aside



To close the door, turn the handle down and press it.

- ⇒ Product U-value 0,80W/m²K (2500x2100mm; Ug-0,53)
- ⇒ Watertightness class E750 (EN12208:2000)
- ⇒ Air permeability class 4 (EN 1227:2016; EN 14351-:2006+A2:2016)
- ⇒ Wind load resistance class C3 (EN 12210:1999/AC:2002)

- Jamb width 184 mm
- Sash thickness 88 mm
- Timber selection:
 - fingerjointed or selected laminated pine timber;
 - laminated oak timber
- Timber finishing with waterbased paint or stain. Paint according to RAL color chart, stain according to manufacturer's samples.
- Triple glazing, thickness 48 mm (Ug>0,48W/m²K)
- Glazing with glazing beads from outside, sealing from inside and outside with gasket
- Glazing bar options:
 - Vienna glazing bars(Norwegian style) (1)
 - glued-on decorative bars (Georgian style) (2)
 - decorative bars inside the glass unit (3)

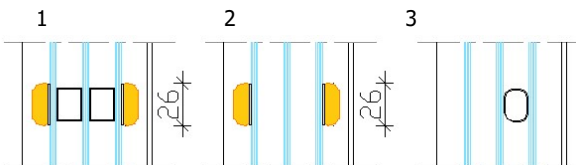

- Standard is a handle on the inside and a recessed grip on the outside
- Extras:
 - lockable handles
 - 2-sided handles + euro cylinder lock
 - special glasses (toughened, laminated, sun protection, self cleaning, pattern, etc.),
 - Soft Close, Soft Open

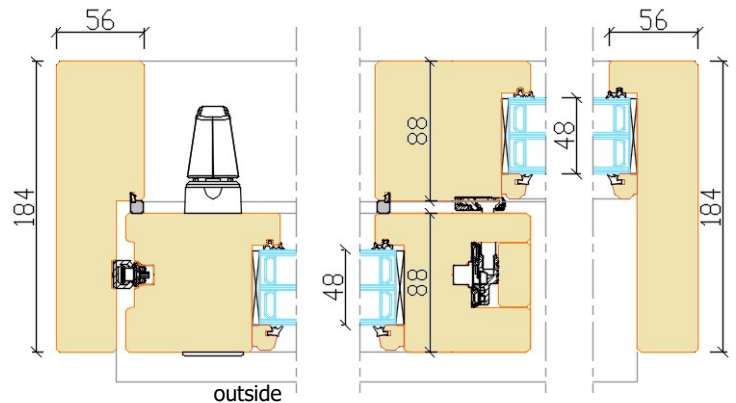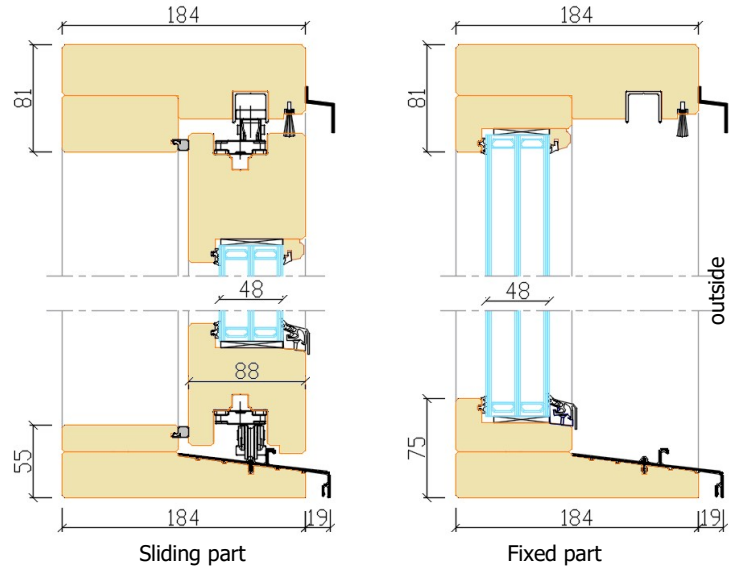


Sash width 756 ... 2045 mm
 Sash height 646 ... 2545 mm
 Sash weight up to 200 kg
 Sash height : Sash width = max 2:1
 Jamb width 1500 ... 6400 mm
 Jamb height 750 ... 2650 mm

Various combinations with opening and non-opening parts.

Outside view


Scheme A



1 sliding sash Left




Scheme K




1 sliding sash Right



Scheme C



2 sliding sashes on the sides



2 sliding sashes in the middle



The non-opening part of the sliding door is divided into several parts by a vertical post.