




AruAL 60 Nordwin Classic EX Outwards opening wooden-aluminium window






- Made to Measure Sizes
- Thermal performance of window $U_w 1,3 \text{ W/m}^2\text{K}$
(openable window 1230x1480 mm; glass $U_g 1,1$)
- Frame 115 mm (or 95 mm)+aluminium cladding (127,5/107,5 mm)
- Sash profile thickness 60 mm+aluminium cladding
- Timber selection: laminated pine timber, laminated oak timber
- Timber finishing with waterbased paint or stain. Paint according to RAL colour chart, stain according to manufacturer's samples.
- Aluminium finishing according to RAL colour chart
- 1 sash gasket
- Double glazing thickness 26 mm
- Glazing sealed with internal and external gasket
- Glazing bar options:
 1. penetrating bars
 2. glued on both sides of glass+slats inside the glazing (Norwegian style)
 3. glued on both sides of glass (Georgian style)
 4. decorative bars inside the glazing


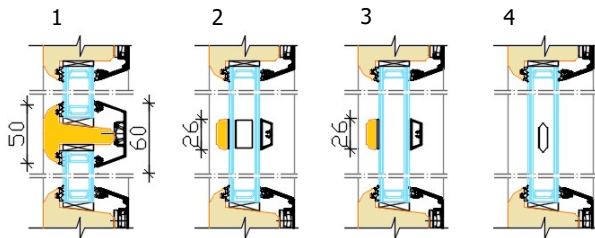


- Extras:
 - jamb extensions;
 - grooves for the extension (10x10 mm grooved frame);
 - window boards;
 - vents;
 - special glasses (toughened, laminated, sun protection, self cleaning, pattern etc.);
 - various glass spacers;
 - key lockable handles, design handles;

- Different combinations of openable and fixed parts are possible in the common frame
- Triangular fixed windows


OPENING Outside view

-  **FIXED (direct glazing)**
Min sizes 330 x 330 mm
-  **TOPGUIDED**
Min max L= 370...1600 mm H= 370...1600 mm, sash weight max 60 kg
-  **TOPSWING**
Min max L= 380...1600 mm H= 595...1645 mm, sash weight max 60 kg
-  **SIDEHUNG (left/right)**
Min max L= 450...850 mm H= 515...1500 mm, sash weight max 40 kg
-  **SIDE-SLIDEHUNG (concealed hinges; left/right)**
Min max L= 395...850 mm H= 515...1500 mm, sash weight max 50 kg

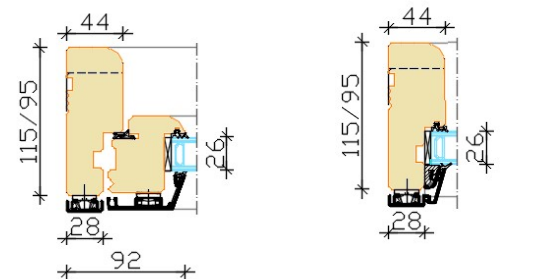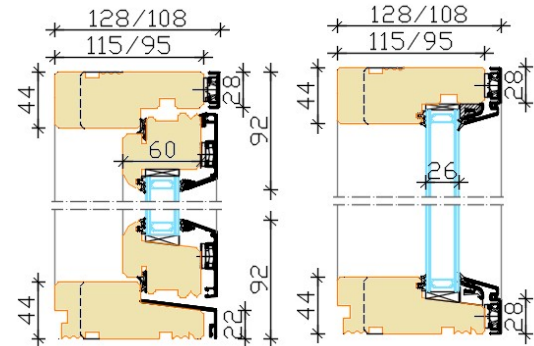

Openable window


Fixed window

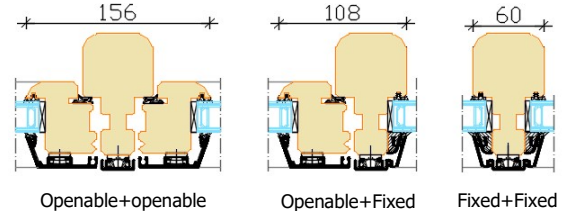

Openable+openable

Openable+Fixed

Fixed+Fixed

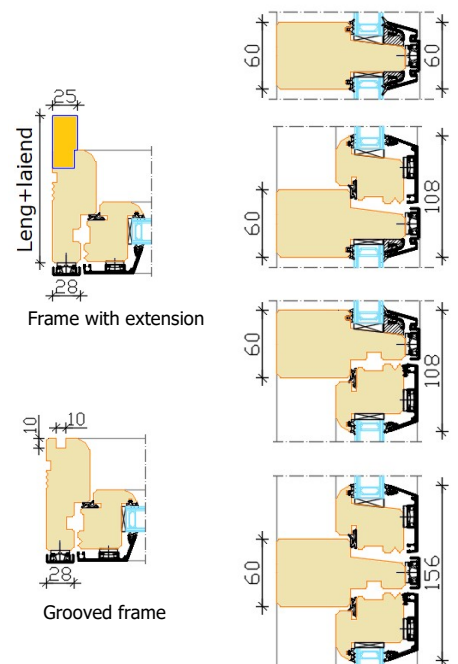

Frame with extension

Grooved frame