



“Aru AL 78 CORA IN” is a tilt & turn timber window with a 78 mm thick timber sash. On the outside, the window’s jamb and sash are both covered with aluminium profiles. The larger sash thickness accommodates triple glazed units and double seals suitable for a modern energy saving building; this increases insulation values enough for use in a so-called passive house. The aluminium cover increases the life-span of the window and makes cleaning it simpler.



The wooden parts are made of laminated timber. To reduce heat loss at the edge of the glass, we recommend using an insulated glazing that has SWS (plastic) spacers rather than the traditional metal.

# AruAL 78 CORA IN

## INWARD OPENING TILT&TURN WOODEN-ALUMINIUM WINDOW

### PROFILE IV78

Jamb: 78x78 mm

Frame: 78x78 mm


Inside groove for windowcill 6x30mm

outside groove for aluminium cill 12x30 mm

### FURNITUR

Fittings: ROTO NT

Handle: ROTO, HOPPE



### GLASS

42 mm triple glazed units ( $U_g \geq 0,56 \text{ W/m}^2\text{K}$ )

Glazing from the inside with wooden glazing bead



Fastened with hidden nails, sealed with silicone

### SEAL

2-chamber seal surrounding middle frame rebate


TIMBER FINISHING with water-based paint or stain

ALUMINIUM FINISHING RAL aluminium colour range

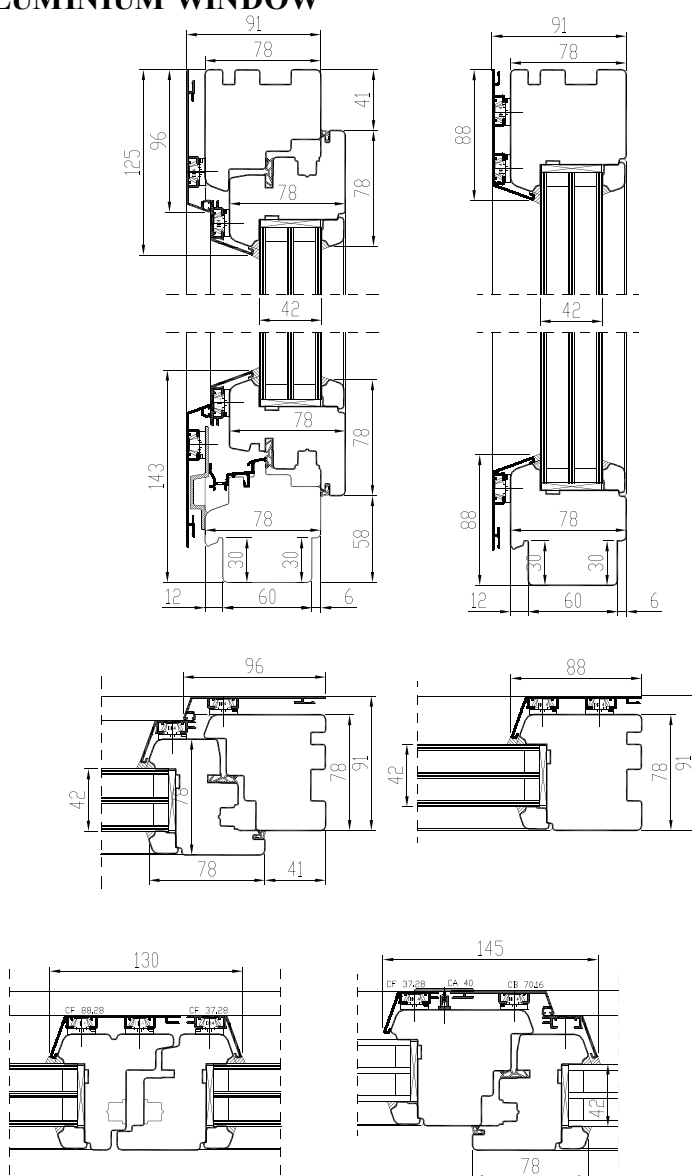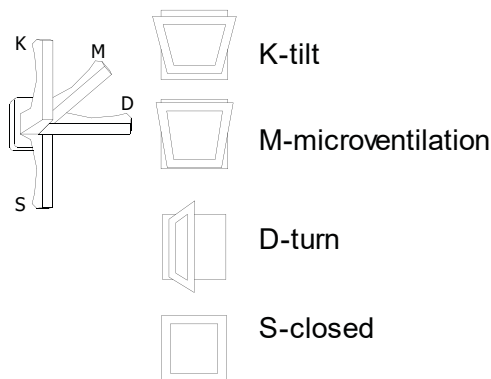


### GLAZING BAR OPTIONS



1. Penetrating bars
2. Taped bars Norwegian style
3. Taped bars Georgian style

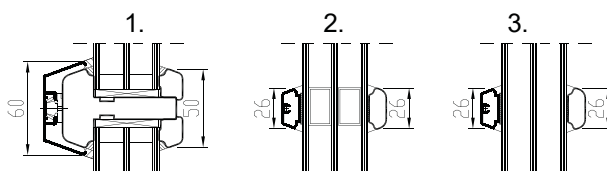

Triangular window




Round-headed window




F - FIXED

min measures 330 x 330 mm




DK - TILT AND TURN (LEFT / RIGHT)

min max L=410...1710 mm H=420...2527 mm, weight max 130 kg



D - SIDEHUNG (LEFT / RIGHT)

min max L=410...1710 mm H=420...2527 mm, weight max 130 kg



KIPP - TOPHUNG (Handle above)

weight max 80 kg

NB! Maximum and minimum dimensions and opening possibilities also depend on the aspect ratio. Please ask our specialists for additional information.