
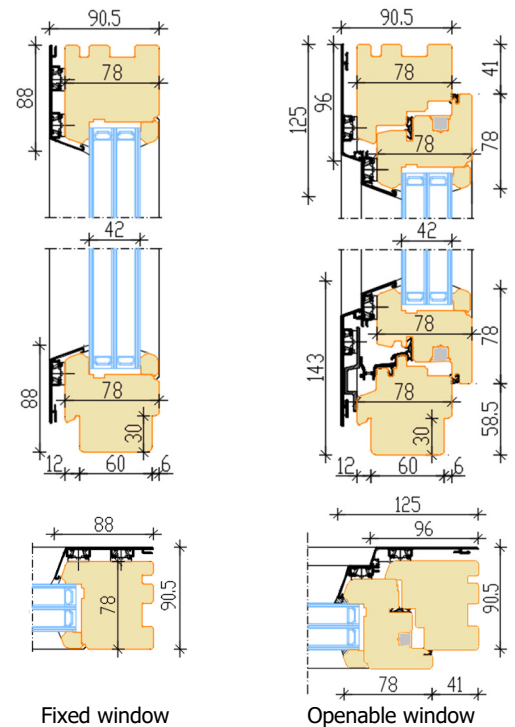


AruAL 78 Cora IN Inward opening tilt-and-turn wooden-aluminium window



- Made to Measure Sizes
- Good thermal performance—Window Uw 0.85 W/m²K of window 1230x1480 mm, glass Ug-0,56
- Frame thickness 78 mm + aluminium cover
- Sash profile thickness 78 mm + aluminium cover
- Timber selection:
 - fingerjointed or selected laminated pine timber;
 - laminated oak timber
- Timber finishing with waterbased paint or stain. Paint according to RAL color chart, stane according to manufacturer's samples.
- Aluminium cladding - powder coated. Paint according to RAL color chart
- Triple glazing, thickness 42 mm (Ug>0,56)
- Glazing with glazing beads inside, sealing from inside and outside with silicone
- Glazing bar options:
 1. penetrating glazing bars
 2. Vienna glazing bars (Norwegian style)
 3. glued-on decorative bars (Georgian style)
 4. decorative bars inside the glass unit

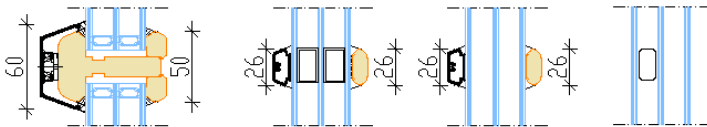


Fixed window

Operable window


- Extras:
 - jamb extensions, window boards,
 - trickle vents;
 - special glasses (toughened, laminated, sun protection, self cleaning, pattern, etc.), different materials and different colors of edge mouldings;
 - tilt first opening (TF), safety fittings
 - lockable handles, design handles;
 - insect nets
- Various combinations with opening and non-opening parts
- Special shape windows



Section through mullion
 Opening sash /Fixed light

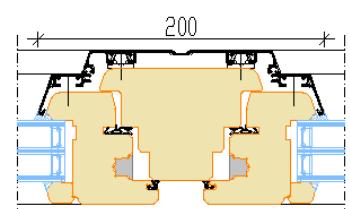


Section through fixed mullion
 Opening sash/Opening sash




Section without mullion
 Secondary sash/Primary sash


OPENING: Inside view




FIXED (direct glazing)
 Min sizes 330 x 330 mm



Tilt and turn (left/right)
 Min max L= 420...1710 mm H= 420...2527 mm,
 max weight of sash 130 kg



Turn only (left/right)
 Min max L= 420...1710 mm H= 420...2527 mm,
 max weight of sash 130 kg



Tilt only
 Min max L= 440...2500 mm H= 420...1300 mm,
 max weight of sash 80 kg

Handle positions:

