

EASY LINE–COMPATIBLE PROFILED PANEL

CEWOOD ceiling panels are designed for use in Easy Line suspended ceiling systems. This solution provides a visually precise and clean ceiling appearance, where the Easy Line profile creates a defined and consistent joint between panels while maintaining a minimal visible grid.


ⓘ Note: Not suitable for flat T15 metal grid profiles.




Technical specifications

Wood wool width	1.0 mm; other wood wool upon request
Panel thickness	25 mm
Panel size	595x595 mm
Colours	natural painted, white, black, grey and any shade in RAL or NCS system upon request
Fire reaction class	B-s1, d0; A2-s1, d0
Suspended ceiling system	Easy Line grid system

Panel edge profile

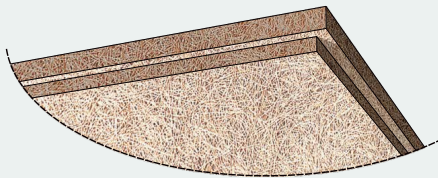

Immersed ceiling profile

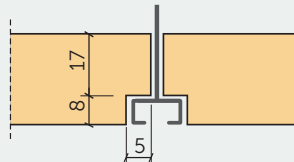

Panel thickness: 25 mm



Installation guidelines

For general suspended ceiling frame assembly principles and important details, refer specifically to the "Visible T-type profile frame assembly" section in the document "Suspended ceilings T-profile system", available on the CEWOOD website (www.cewood.com) under Downloads → Installation manuals.

ⓘ This document serves as a reference for suspended ceiling system layout and suspension principles. The general hardware components and layout principles are applicable without modification, provided that an **Easy Line profile system** is used and a **600x600 mm** module layout is applied, as intended for the CEWOOD ceiling panel solution.