


MIRRORS II



ST SERIES

- Plexiglas edge with LED lighting
- Infrared sensor with dim light option
- Mirror heating (mist removal) with on/off switch (IP44)
- Equipped with safe PVC film on the back side of mirror glass
- Possible to install horizontally and vertically
- DualWhite colour temperature 4000/6000 K (600x600 only 6000 K)
- Mirror thickness 5 mm

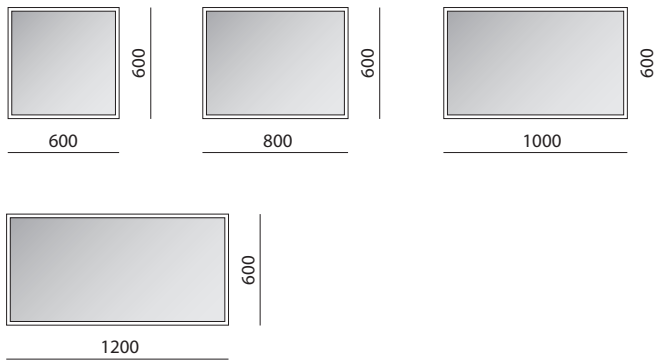

DO SERIES

- Backlit mirror (LED)
- Infrared sensor with dim light option
- Digital clock, with white digits
- Mirror heating (mist removal) with on/off switch (IP44)
- Equipped with safe PVC film on the back side of mirror glass
- DualWhite colour temperature 4000/6000 K
- Mirror thickness 5 mm

