



Austrian Institute of Construction Engineering
 Schenkenstrasse 4 | T+43 1 533 65 50
 1010 Vienna | Austria | F+43 1 533 64 23
 www.oib.or.at | mail@oib.or.at



European Technical Assessment

ETA-11/0135
of 21.10.2016

General part

Technical Assessment Body issuing the European Technical Assessment

Österreichisches Institut für Bautechnik (OIB)
Austrian Institute of Construction Engineering

Trade name of the construction product

SIHGA HobaFix

Product family to which the construction product belongs

Beam hanger for timber-to-timber connections

Manufacturer

SIHGA Handels GmbH
Gewerbepark Kleinreith 4
4694 Ohlsdorf
Austria

Manufacturing plant

Manufacturing plant 1

This European Technical Assessment contains

24 pages including 5 Annexes which form an integral part of this assessment.

This European Technical Assessment is issued in accordance with Regulation (EU) No 305/2011, on the basis of

Guideline for European Technical Approval ETAG 015 "Three-dimensional nailing plates", Edition November 2012, used as European Assessment Document

This European Technical Assessment replaces

European technical approval ETA-11/0135 with validity from 08.02.2012 to 20.10.2016

Remarks

Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and should be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may be made with the written consent of Austrian Institute of Construction Engineering. Any partial reproduction has to be identified as such.

Specific parts

1 Technical description of the product

1.1 General

This European Technical Assessment¹ (ETA) applies to the beam hanger SIHGA HobaFix to be used in load-bearing timber to timber connections. The beam hanger SIHGA HobaFix consists of two parts which are inserted into each other. A fixing screw is used to mount the two parts. Installation of the two parts of the beam hanger into the timber is carried out with special screws.

SIHGA HobaFix corresponds to the specifications given in the Annexes 1, 2 and 4. The material characteristics, dimensions and tolerances of SIHGA HobaFix, not indicated in these Annexes, are given in the technical file² of the European Technical Assessment.

1.2 Beam hanger

SIHGA HobaFix is made of extruded aluminium EN AW 6063 according to EN 573-2³. Aluminium with the same or higher strength may be used. There are six sizes of the beam hanger, type HF 70, HF 100, HF 135, HF 170, HF 200, HF 240 which are identical in shape as well as type HF Fassade. The seven types together with their most important dimensions are shown in Annex 2.

1.3 Screws

The screws for installation of the two parts of the beam hanger into the timber are described in Annex 1. They are made of hardened carbon steel.

1.4 Fixing screws

The fixing screws used to mount the two parts of the beam hanger are described in Annex 1. They are made of steel for quenching and tempering according to EN 10083.

2 Specification of the intended use(s) in accordance with the applicable European Assessment Document

2.1 Intended use

The beam hangers are intended to be used in load bearing connections of timber structures as end-grain to side-grain connections, e.g. between beams, in solid timber of softwood of strength class C24 or better according to EN 338.

The typical installation of the beam hangers is shown in Annex 2.

The beam hangers shall be subjected to static and quasi static actions only.

¹ The ETA-11/0135 was firstly issued in 2011 as European technical approval with validity from 21.10.2011, amended in 2012 with validity from 08.02.2012 and amended and converted in 2016 to the European Technical Assessment ETA-11/0135 of 21.10.2016.

² The technical file of the European Technical Assessment is deposited at Österreichisches Institut für Bautechnik and, in so far as is relevant to the tasks of the notified factory production control certification body involved in the assessment and verification of constancy of performance procedure, is handed over to the notified factory production control certification body.

³ Reference documents are listed in Annex 5.

provisions are based upon the current state of the art and the available knowledge and experience⁴.

The indications given as to the working life of the construction product cannot be interpreted as a guarantee neither given by the product manufacturer or his representative nor by EOTA nor by the Technical Assessment Body, but are regarded only as a means for choosing the appropriate products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and reference to the methods used for its assessment

3.1 Essential characteristics of the product

Table 1: Essential characteristics of the product and product performance

No	Essential characteristic	Product performance
Basic requirement for construction works 1: Mechanical resistance and stability ¹⁾		
1	Characteristic load bearing capacity	3.1.1
2	Stiffness	No performance assessed.
3	Ductility in cyclic testing	No performance assessed.
Basic Requirement 2: Safety in case of fire		
4	Reaction to fire	3.1.2
5	Resistance to fire	No performance assessed.
Basic requirement for construction works 3: Hygiene, health and the environment		
6	Content, emission and/or release of dangerous substances	3.1.3
Basic requirement for construction works 4: Safety and accessibility in use		
7	Same as basic requirement for construction works 1	
Basic requirement for construction works 5: Protection against noise		
–	Not relevant. No characteristic assessed.	
Basic requirement for construction works 6: Energy economy and heat retention		
–	Not relevant. No characteristic assessed.	
Basic requirement for construction works 7: Sustainable use of natural resources		
–	No characteristic assessed.	
General aspects		
8	Resistance to corrosion and deterioration	3.1.4
9	Dimensional stability	3.1.5
¹⁾ These characteristics also relate to basic requirement for construction works 4.		

⁴ The real working life of a product incorporated in a specific works depends on the environmental conditions to which that works is subject, as well as on the particular conditions of the design, execution, use and maintenance of that works. Therefore, it cannot be excluded that in certain cases the real working life of the product can also be shorter than the assumed working life.

electronic copy

3.1.1 Characteristic load bearing capacity

The characteristic load bearing capacities of the beam hangers are determined by testing. The beam hangers are installed with a defined number of screws with respective nominal diameter and mounted with fixing screws as specified in Annex 1 and Annex 2. Kinematic boundary conditions are defined in Annex 3.

The values of the characteristic load bearing capacities for the loading directions F_1 to F_4 as defined in Annex 3 are given in Annex 4.

3.1.2 Reaction to fire

The beam hangers are made of aluminium and the screws and fixing screws are made of steel, all classified as Euroclass A1 in accordance with Commission Decision 96/603/EC as amended.

3.1.3 Content, emission and/or release of dangerous substances

The release of dangerous substances is determined according to ETAG 015. No dangerous substances is the performance of the product in this respect.

NOTE In addition to the specific clauses relating to dangerous substances contained in the European Technical Assessment, there may be other requirements applicable to the products falling within its scope (e.g. transposed European legislation and national laws, regulations and administrative provisions). In order to meet the provisions of the Construction Products Regulation, these requirements need also to be complied with, when and where they apply.

3.1.4 Resistance to corrosion and deterioration

The product is intended to be used in service classes 1 and 2 according to EN 1995-1-1. The product and each member of the connection should at least be suitable for service classes 1 and 2, but not for service class 1 only.

In accordance with ETAG 015 and EN 1995-1-1 the beam hangers are made of extruded aluminium according to EN 573-2. The screws for installation and the fixing screws are made of hardened carbon steel and steel for quenching and tempering, respectively. Installation screws, as well as, fixing screws are zinc coated.

3.1.5 Dimensional stability

The effects of dimensional changes on the structural timber members being jointed due to varying moisture content was considered by the determination of the characteristic load bearing capacity of the joints. Moisture content during service shall not change to such an extent that adverse deformation will occur. The conditions of Clause 2.2 shall be observed.

3.2 Assessment methods

3.2.1 General

The assessment of the essential characteristics in Clause 3.1 of SIHGA HobaFix for the intended use, and in relation to the requirements for mechanical resistance and stability, for safety in case of fire, for hygiene, health and the environment and for safety and accessibility in use in the sense of the basic requirements for construction works № 1, 2, 3 and 4 of Regulation (EU) № 305/2011 has been made in accordance with Guideline for European Technical Approval ETAG № 015 "Three-dimensional nailing plates", edition November 2012, used as European Assessment Document.

3.2.2 Identification

The European Technical Assessment for SIHGA HobaFix is issued on the basis of agreed data that identify the assessed product. Changes to materials, to composition, to characteristics of the product, or to the production process could result in these deposited data being incorrect. Österreichisches Institut für Bautechnik should be notified before the changes are implemented, as an amendment of the European Technical Assessment is possibly necessary.

4 Assessment and verification of constancy of performance (thereafter AVCP) system applied, with reference to its legal base

4.1 System of assessment and verification of constancy of performance

According to Commission Decision 97/638/EC the system of assessment and verification of constancy of performance to be applied to the SIHGA HobaFix is System 2+. System 2+ is detailed in Commission Delegated Regulation (EU) № 568/2014 of 18 February 2014, Annex, 1.3, and provides for the following items

- (a) The manufacturer shall carry out:
 - (i) an assessment of the performance of the construction product carried out on the basis of testing (including sampling), calculation, tabulated values or descriptive documentation of that product;
 - (ii) factory production control;
 - (iii) testing of samples taken at the manufacturing plant by the manufacturer in accordance with a prescribed test plan⁵.
- (b) The notified factory production control certification body shall decide on the issuing, restriction, suspension or withdrawal of the certificate of conformity of the factory production control on the basis of the outcome of the following assessments and verifications carried out by that body:
 - (i) initial inspection of the manufacturing plant and of factory production control;
 - (ii) continuing surveillance, assessment and evaluation of factory production control.

4.2 AVCP for construction products for which a European Technical Assessment has been issued

Manufacturers undertaking tasks under Systems 2+ shall consider the European Technical Assessment issued for the construction product in question as the assessment of the performance of that product. Manufacturers shall therefore not undertake the tasks referred to in point 4.1 (a)(i).

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document

5.1 Tasks for the manufacturer

5.1.1 Factory production control

In the manufacturing plant the manufacturer shall establish and continuously maintain a factory production control. All procedures and specification adopted by the manufacturer shall be documented in a systematic manner. The factory production control shall ensure the constancy of performances of the product with regard to the essential characteristics.

The manufacturer shall only use raw materials supplied with the relevant inspection documents as laid down in the control plan. The incoming raw materials shall be subject to controls by the manufacturer before acceptance. Check of incoming materials shall include control of inspection documents presented by the manufacturer of the raw materials.

The frequencies of controls and tests conducted during manufacturing and on the assembled product are defined by taking account of the manufacturing process of the product and are laid down in the control plan.

The results of factory production control are recorded and evaluated. The records include at least the following data:

⁵ The prescribed test plan has been deposited with Österreichisches Institut für Bautechnik and is handed over only to the notified factory production control certification body involved in the procedure for the assessment and verification of constancy of performance. The prescribed test plan is also referred to as control plan.

- Designation of the product, basic materials and components
- Type of control or test
- Date of manufacture of the product and date of testing of the product or basic materials or components
- Results of controls and tests and, if appropriate, comparison with requirements
- Name and signature of person responsible for factory production control

The records shall be presented to the notified factory production control certification body involved in continuous surveillance. On request the records shall be presented to Österreichisches Institut für Bautechnik.

5.1.2 Declaration of performance

The manufacturer is responsible for preparing the declaration of performance. When all the criteria of the assessment and verification of constancy of performance are met, including the certificate of conformity of the factory production control issued by the notified factory production control certification body, the manufacturer shall draw up a declaration of performance.

5.2 Tasks for the notified factory production control certification body

5.2.1 Initial inspection of the manufacturing plant and of factory production control

The notified factory production control certification body shall verify the ability of the manufacturer for a continuous and orderly manufacturing of the SIHGA HobaFix according to the European Technical Assessment. In particular the following items shall be appropriately considered.

- Personnel and equipment
- The suitability of the factory production control established by the manufacturer
- Full implementation of the control plan

5.2.2 Continuous surveillance, assessment and evaluation of factory production control

The notified factory production control certification body shall visit the factory at least once a year for routine inspection. In particular the following items shall be appropriately considered.

- The manufacturing process including personnel and equipment
- The factory production control
- The implementation of the control plan

The results of continuous surveillance shall be made available on demand by the notified factory production control certification body to Österreichisches Institut für Bautechnik. When the provisions of the European Technical Assessment and the control plan are no longer fulfilled, the certificate of conformity of the factory production control shall be withdrawn.

Issued in Vienna on 21.10.2016
by Österreichisches Institut für Bautechnik


The original document is signed by:

Rainer Mikulits
Managing Director

electronic copy electronic copy

Beam hanger	Number of HobaFix system-screws GoFix	Nominal diameter of screw	Nominal length of screw	Tensile strength of screw
—	—	mm	mm	N/mm ²
HobaFix HF 240	15	6.0	100	≥ 600
HobaFix HF 200	12			
HobaFix HF 170	14	5.0	80	
HobaFix HF 135	11			
HobaFix HF 100	8			
HobaFix HF 70	6	4.0	60	
HobaFix HF Fassade	4 (main beam)	5.0	40	
	5 (secondary beam)		80	


HobaFix system screw
 GoFix FK Ø5,0 x 40mm
 HobaFix HF Fassade

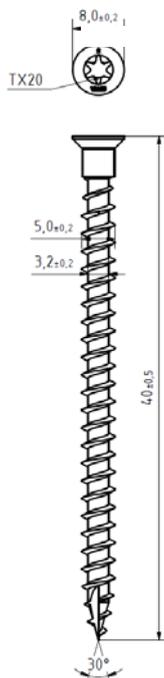


Dimensions in mm

SIHGA HobaFix	Annex 1 of European Technical Assessment ETA-11/0135 of 21.10.2016
Fastener specification – screws	

electronic copy electronic copy


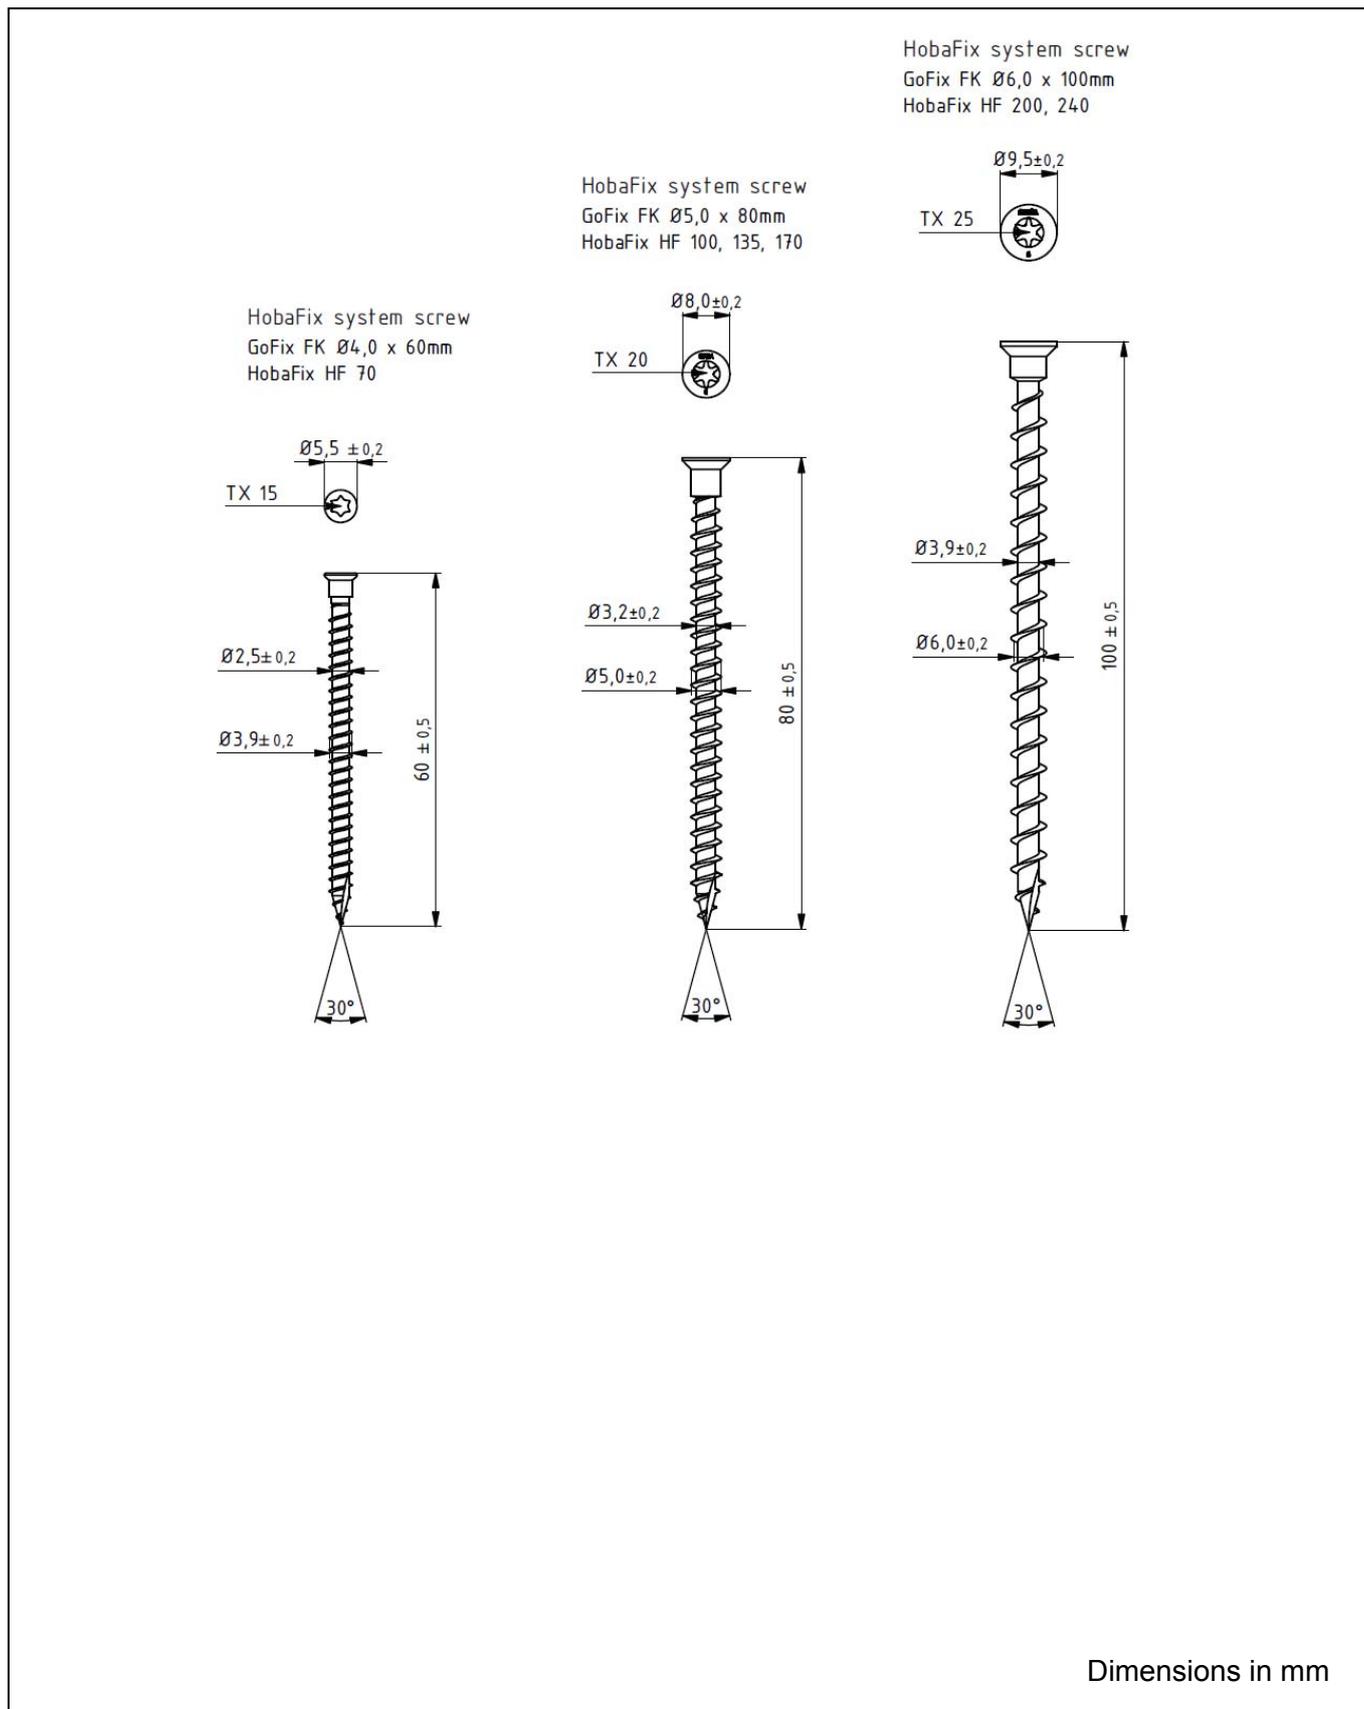


SIHGA HobaFix	Annex 1 of European Technical Assessment ETA-11/0135 of 21.10.2016
Fastener specification – screws	

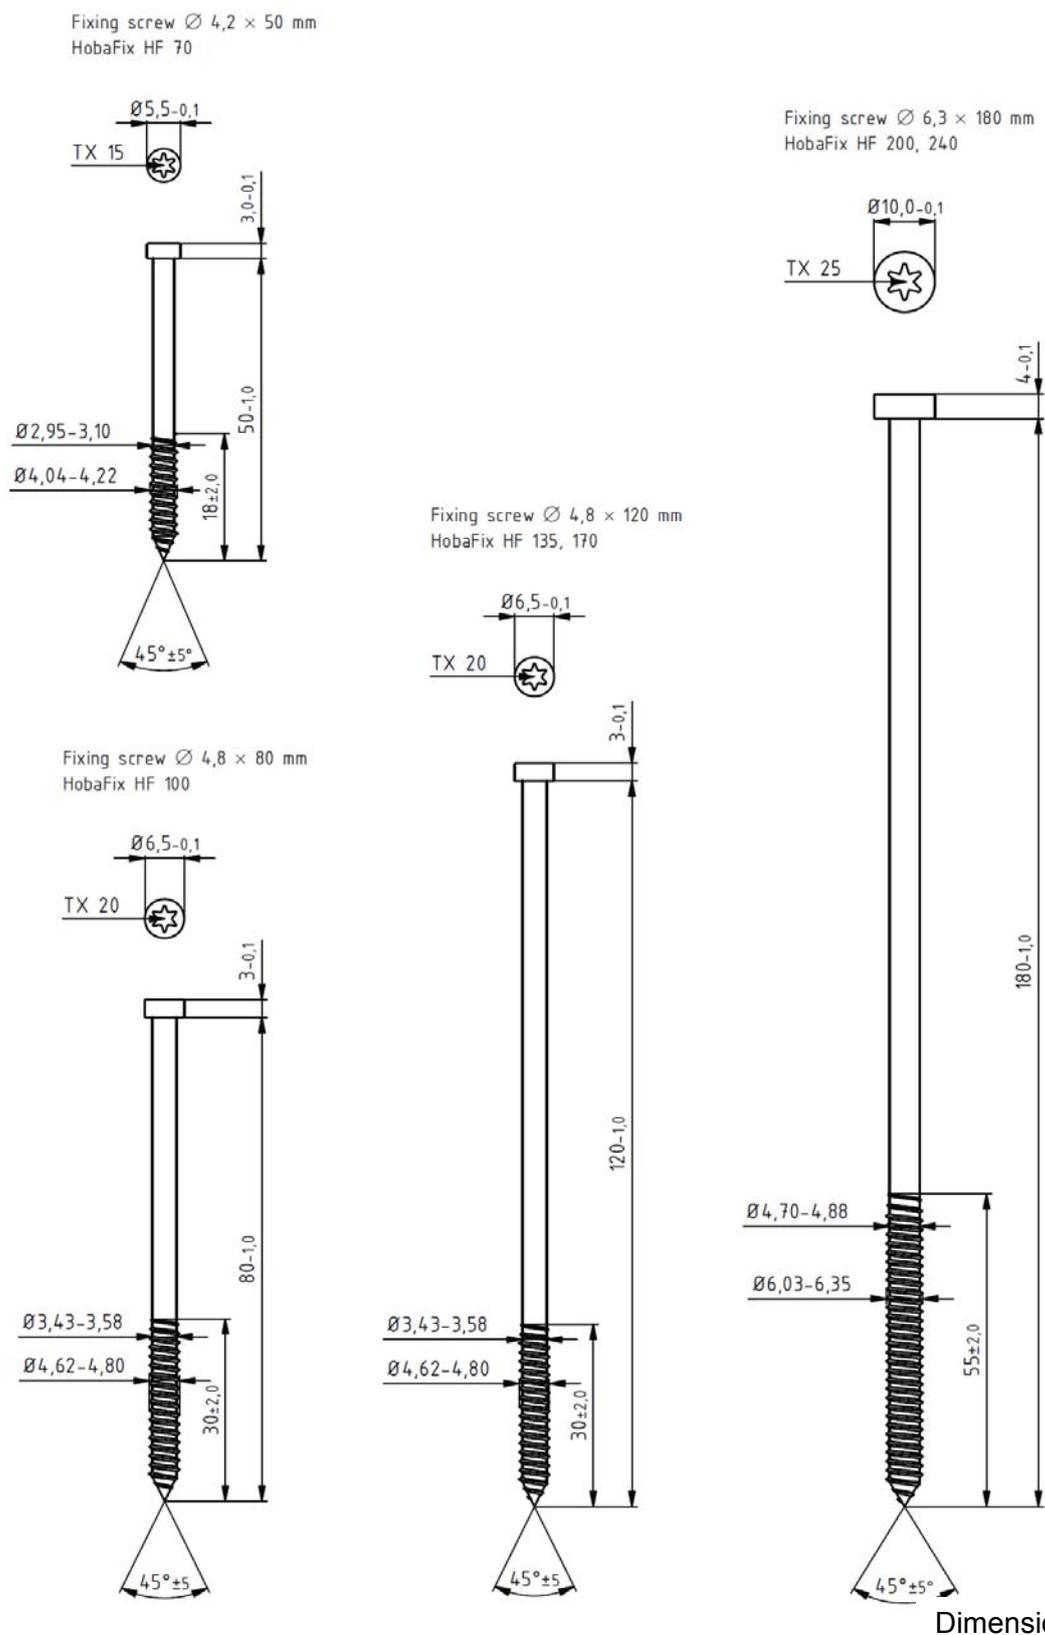


SIHGA HobaFix	Annex 1
Fastener specification – fixing screws	of European Technical Assessment ETA-11/0135 of 21.10.2016

electronic copy electronic copy



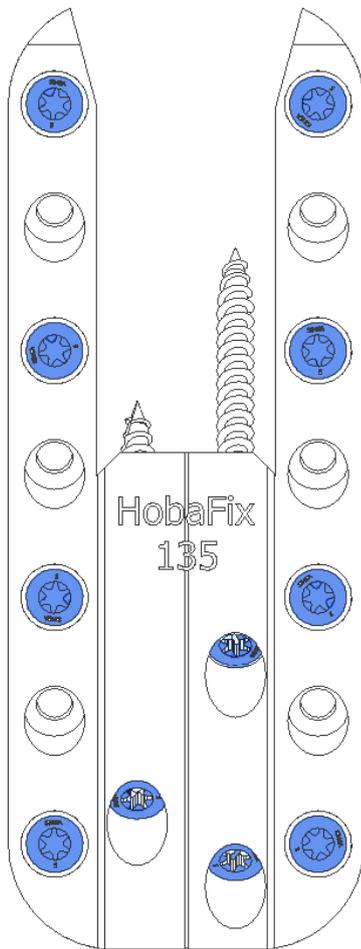
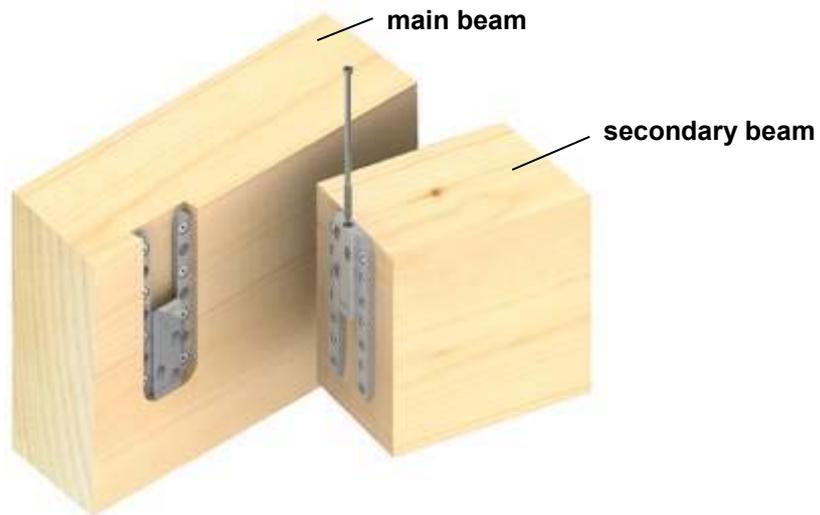


Screw pattern for main beam

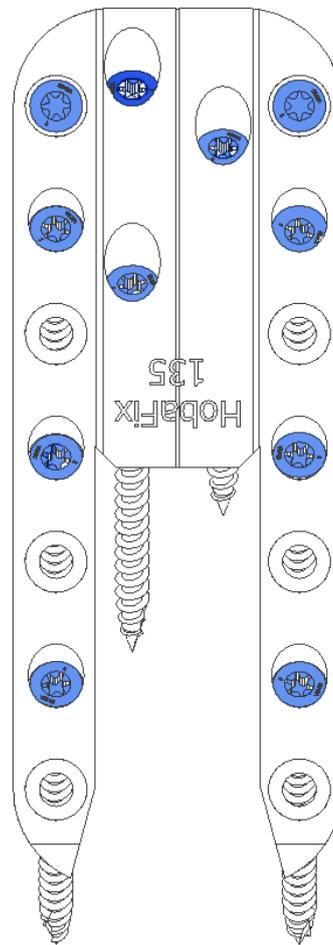

Screw pattern for secondary beam

SIHGA HobaFix	Annex 2
Product details: typical installation of the beam hangers HF 70 to HF 240	of European Technical Assessment ETA-11/0135 of 21.10.2016

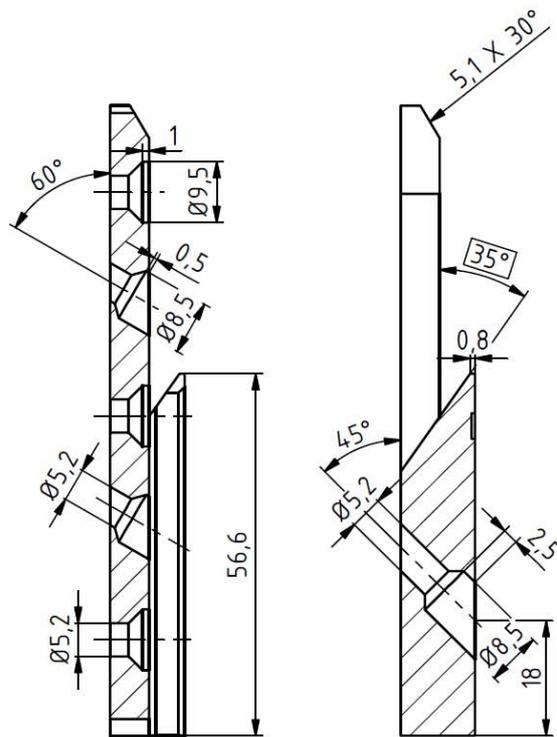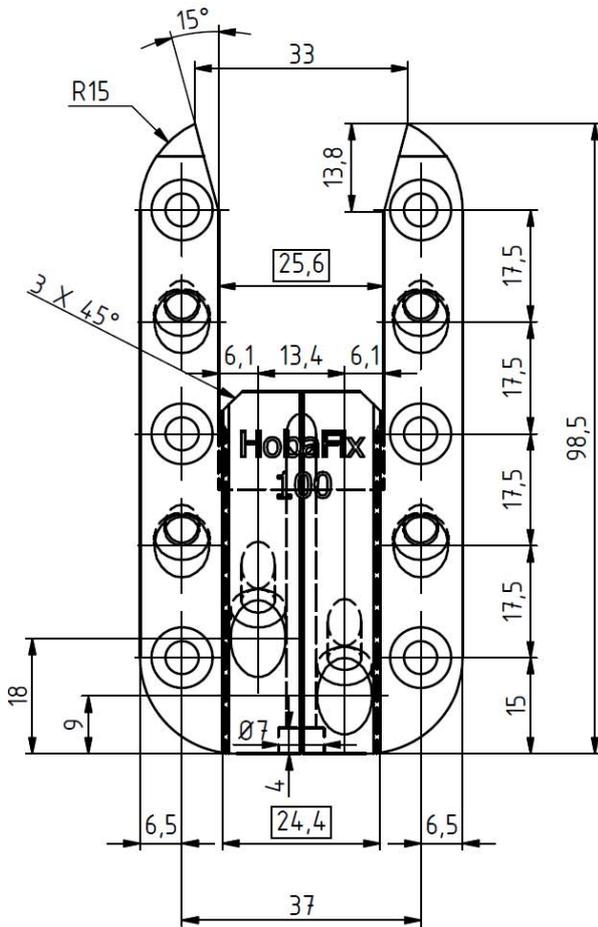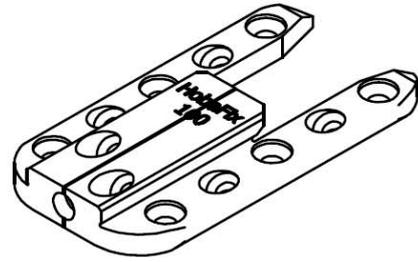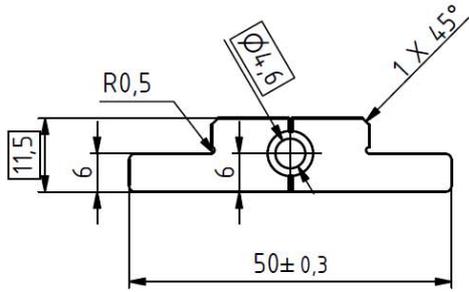


Dimensions in mm

SIHGA HobaFix

Product details:
 Type HF 100 – Nominal dimensions

Annex 2

of European Technical Assessment
 ETA-11/0135 of 21.10.2016

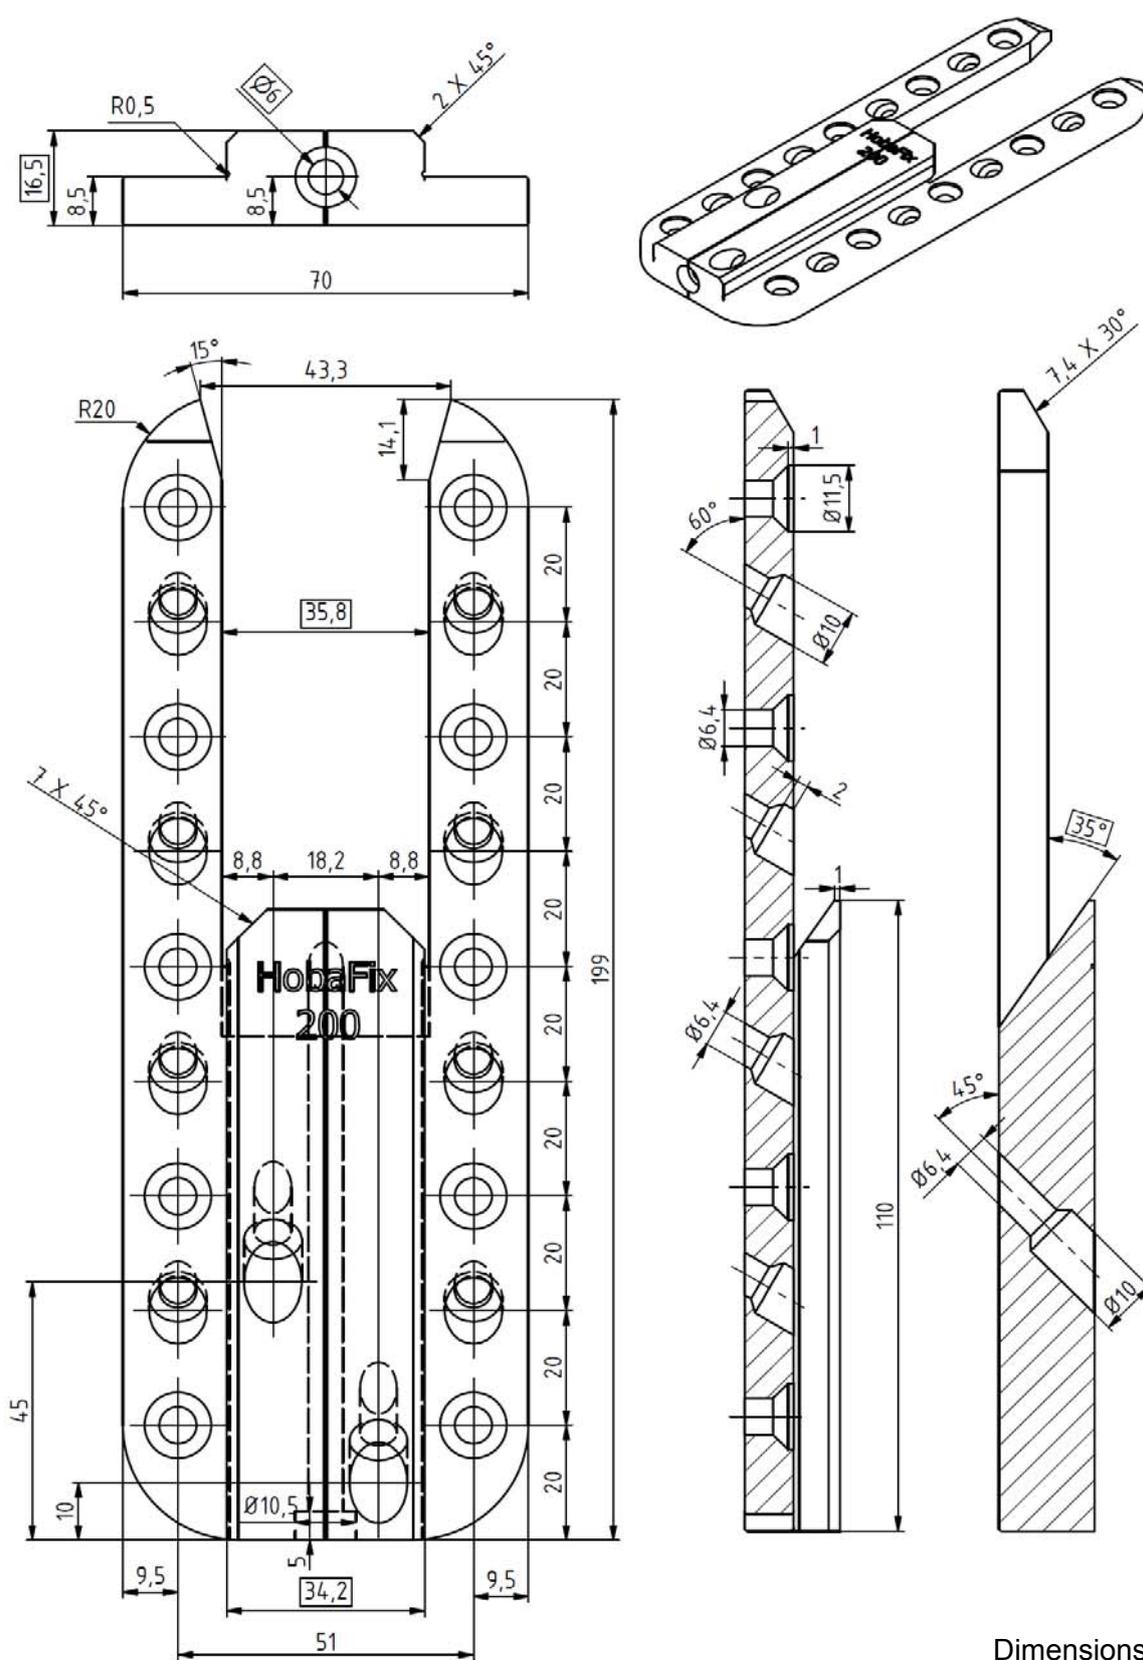


SIHGA Hobafix

Product details:
 Type HF 200 – Nominal dimensions

Annex 2

of European Technical Assessment
 ETA-11/0135 of 21.10.2016

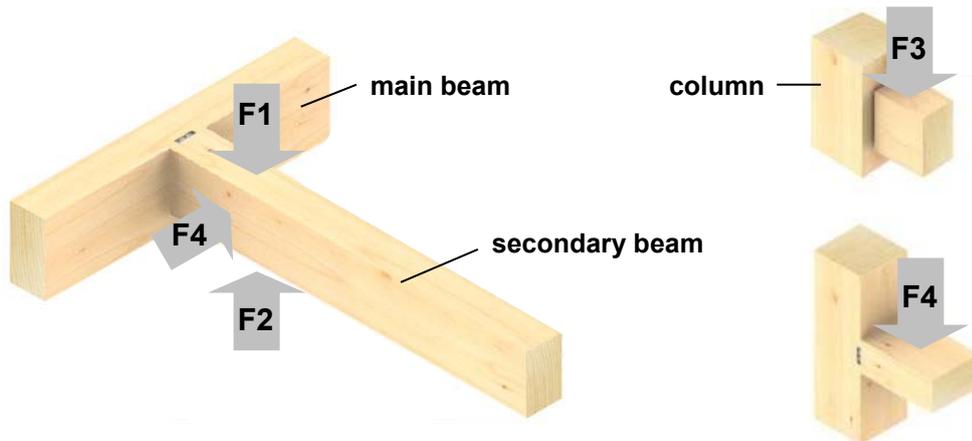

Wooden structural components

Beam, solid wood, strength class C24 according to EN 338.

Forces and their directions

- F₁ Force acting in direction of insertion. Connection of main beam and secondary beam. The members shall be prevented from rotation.
- F₂ Force acting against direction of insertion. Connection of main beam and secondary beam. The members shall be prevented from rotation.
- F₃ Force acting in direction of insertion. Connection of column and secondary beam. The members shall be prevented from rotation.
- F₄ Force acting perpendicular to direction of insertion. Connection of main beam and secondary beam or column and secondary beam. The members shall be prevented from rotation.

SIHGA HobaFix	Annex 3
Definition of forces and their directions	of European Technical Assessment ETA-11/0135 of 21.10.2016

electronic copy

