



Systemvertrieb Innovativer Holzbauprodukte
Gmunden Austria

SIHGA® GmbH | Gewerbepark Kleinreith 4
A-4694 Ohlsdorf bei Gmunden

Telefon: +43 7612-74370-0

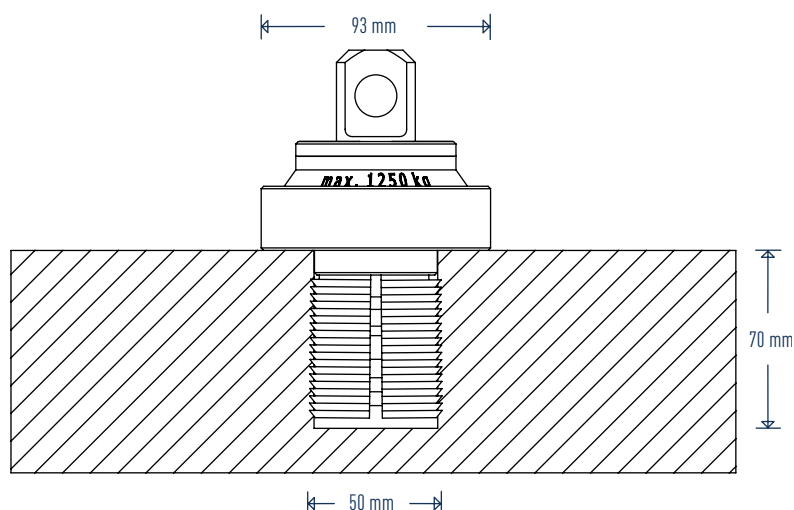
Fax: +43 7612-74370-10



E-Mail: info@sihga.com



Web: www.sihga.com



Pick

Technical Product Information



Pick Load Table				
Beam	Beam dimension			
	min. height	min. width	1 Attachment point 0°*	2 Attachment points 45°
	[mm]	[mm]	[kg]	[kg]
BSH	200	140	1.250	1.370
KVH e.g. Framed wall	60	140	-	1.370

glued Ceiling panels CLT	Panel dimensions			
	min. thickness	min. length and width	2 Attachment points 45°	3 -4 Attachment points 45°
	[mm]	[mm]	[kg]	[kg]
	90	1.000	1.620	2.420

glued Wall panels CLT	Panel dimensions			
	min. thickness	min. length and width	2 Attachment points 45°	2 Attachment points 90°
	[mm]	[mm]	[kg]	[kg]
	90	1.000	1.160	520 (Panel weight / 2)

*Highly resinous timber like pine and larch or walls, mounted at the front side, may only be lifted at an angle of 45° to the borehole axis and with 2 attachment points.

The minimum distance to the surface layer while fastening plates at the front face is min. 2 cm.

The minimum distance between each attachment point equals 50 cm.

The minimum distance between attachment points and beam and plate edge may not be smaller than 25 cm.

TAKE THE BEST

