


# Accessories

## » S3-GPRS-ST, S3-WiFi-ST

### Solis Monitoring System

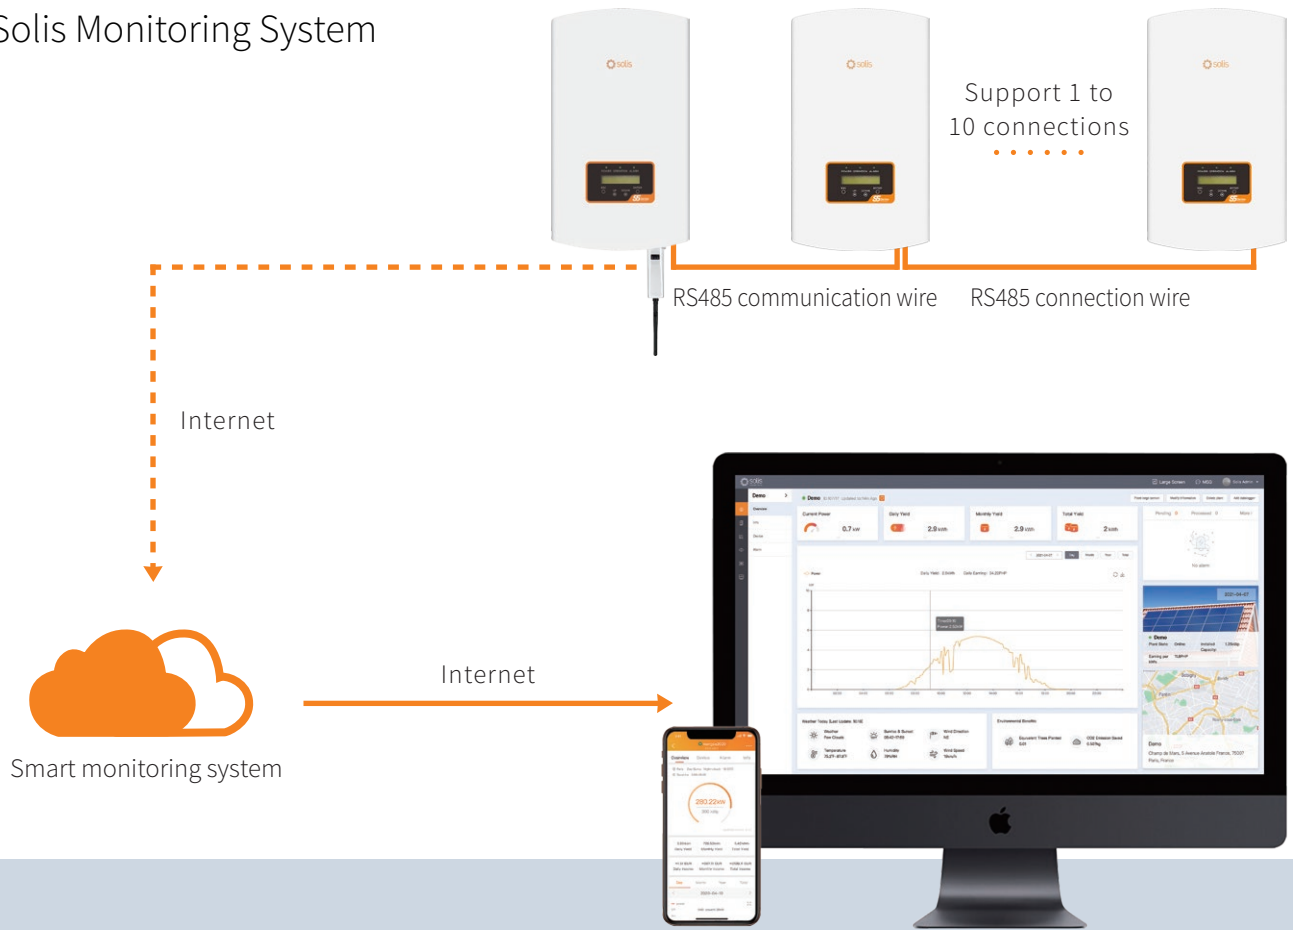

S3-GPRS-ST



S3-WiFi-ST

#### Data Logging Stick: GPRS/WiFi

- Fault alarm, real-time monitoring
- Plug and play, convenient and fast
- Status indicator, easy to display working status
- RESET button, one key to send data, convenient debugging

## Datasheet

Model Name	S3-GPRS-ST	S3-WiFi-ST
------------	------------	------------

### Communication

Supported device type	Solis inverter	
Number of connected inverters <sup>(1)</sup>	≤10	
Data collection intervals	5 minutes (adjustable: 1-15 minutes)	
Status indicator	LED × 3	
Communication interface	4 Pin	
Wireless communication	850/900/1800/1900 MHz	802.11b/g/n (2.4G—2.483G)
Configuration method	APP/WEB	

### Electrical

Operating voltage	DC 5V(+/-5%)	
Operating power consumption	≤5 W	

### Environment

Operating temperature	-30 ~ +65°C	
Operating humidity	5%-95%, relative humidity, no condensa	
Storage temperature	-40 ~ +70°C	
Storage humidity	< 40%	
Operating altitude	≤4000 m	
Protection degree	IP65	

### Mechanical

Dimensions (L*W*H)	133*45*41 mm	128*50*34 mm
Installation method	Insert+Screw	
Weight	84 g	80 g

### Others

Certification	CE	CE, FCC
---------------	----	---------

(1) Connect the inverters by RS485 cables.