

Non treated
Grey painted

Art. Nr. BCK1200NF
Art. Nr. BCK1200GR

Skylight Shed

Skylight Shed - all your garden tools are stored in security shed well lighted via skylight.


- The Skylight Shed range has a generous skylight which supplies nice light in the interior. The double-pitch roof can be assembled either left or right - depending on the sun-light direction. The size of rafters is 40 x 120mm and wall carcassing 41 x 41 mm which gives a very stable construction. Thanks to the simple panel construction is assembly time quick and required on two people.
- Skylight Shed are available in natural and light grey painted finish.
- Lightweight construction thanks to prefabricated elements
- Floor element made of 19 mm solid wood.



The FSC® trademark shows that wood used for products is sourced from environmentally and socially responsible forests, independently certified according to the strict

Easy assemble


Prefabricated pa-

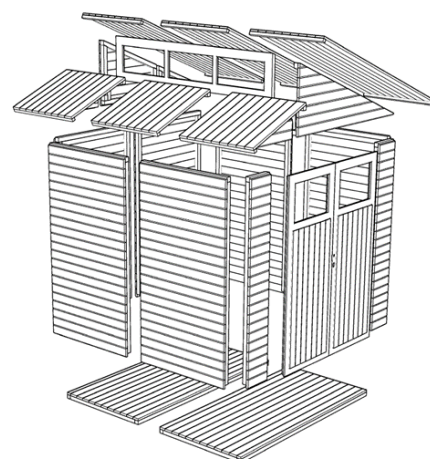


Skylight Shed

Data			
Size	210 x 202 cm	Roof thickness	19 mm
Area	4,24 m ²	Roof area	6,7 m ²
Height	273 cm	Roof angle	22,5 °
Space volume	10,7 m ³	Snow last	sk =1,6 kN/m ²
Wall thickness	19 mm	Door width	137 cm
Wall area	17,3 m ²	Door height	188 cm

Views

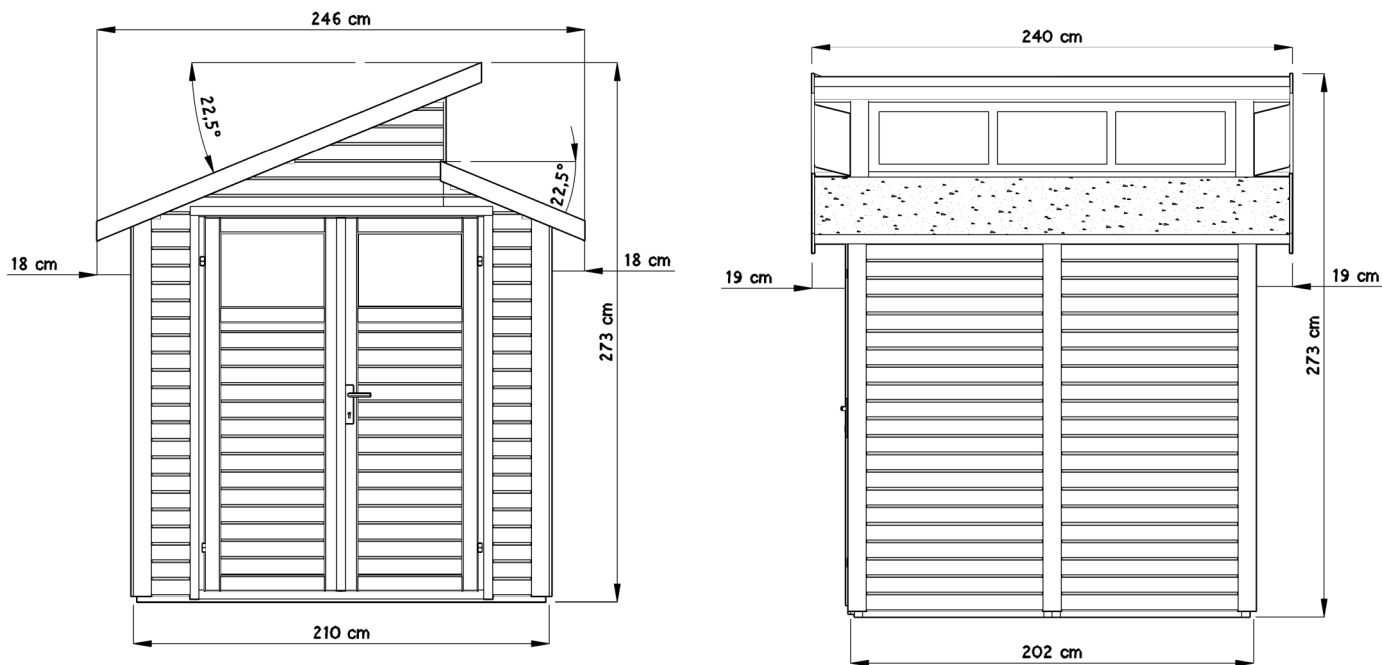


Foundation plan

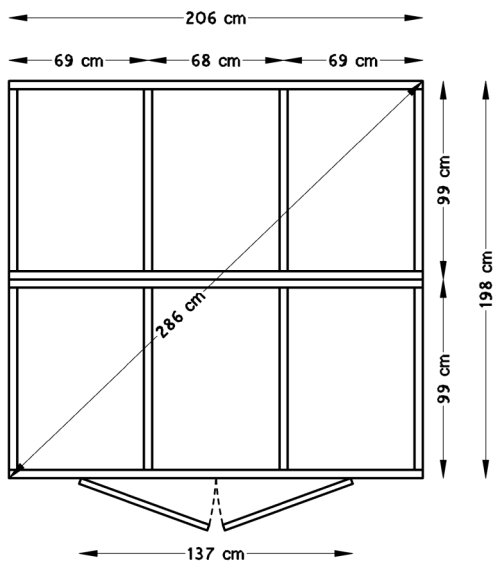

Skylight Shed

Wiev and fittings

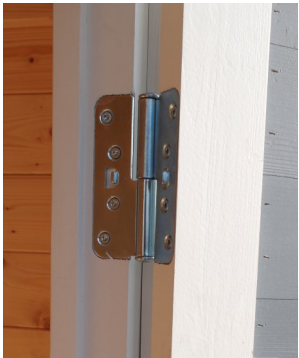


Skylight Shed

Construction design

All panels including floor and roof panels are prefabricated in the factory. The assembly can be carried out in a short time.

Easy assemble

Prefabricated panels

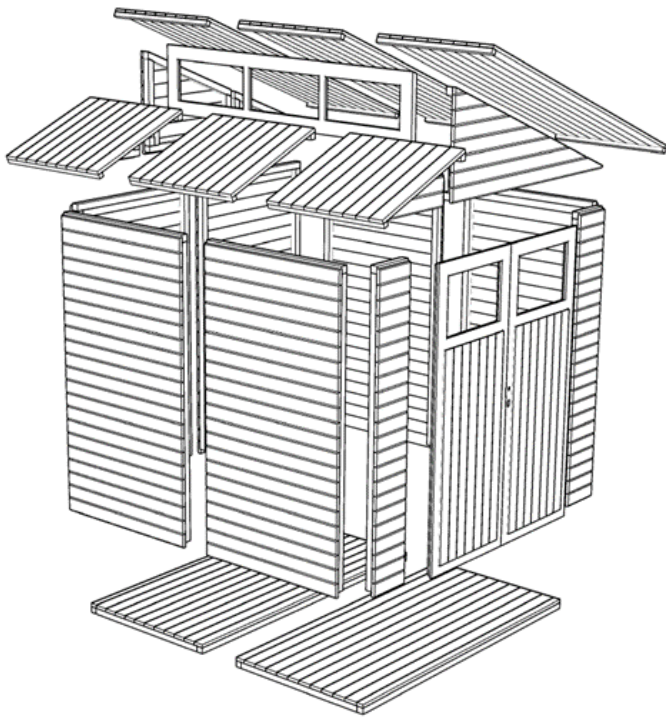

Treatment with wood preservation

It is recommended to treat walls, window,-door frames and all other solid wood parts from inside with an breathing wood stain. Untreated products shall be protected completely from the outside with suitable wood stains or paint.

Color treatment

The boards are painted on automatic spraying line before assembly the panels. Boards are covered with primer and finished coat. Profiles are painted from outside including tongues and grooves. The semimatt water based paint is supplied by Scandinavian producer NORDICA EKO / TEKNOS, meets the highest ecology and quality requirements.

Barge boards and cover strips color white RAL 9010.

Profiles color light grey RAL 7001.

After-treatments can be done with any color.



Skylight Shed

Recommendation for roof

The set including mineral felt for primary cover. Depending on the weather conditions, the condition of mineral felt must be checked regularly and if necessary the renewal of the roofing felt shall be carried out.

Recommendation for fundament and floor panels

A carefully leveled ground is a precondition for the precise assembly the panels and full construticon. The floor panels including the panel frame shall be treated with wood pre-servative before installation. To avoid rising damp the floor can also be protected by placing approximately half a meter wide film strips or granulate pads on ground around the floor.

Required tools



Pack sizes and weight

Length	ca.	214 cm
Width	ca.	100 cm
Height	ca.	68 cm
Weight	ca.	343 kg


Baltic Connexions OÜ

49127 Tabivere / Estonia

Member of the Rowlinson Group

www.bertilo.com

Gartenprodukte aus Holz – ein Beitrag zum Umweltschutz!

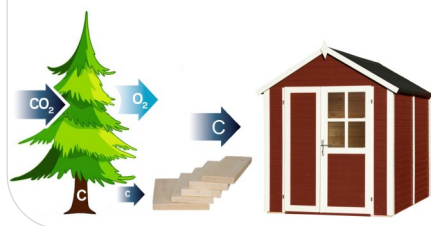

Important notices

Timber is the natural material there are certain weather conditions that may affect the material properties. Small cracks, resin leakages and color changes are natural. Please check the wood protection and screw connections regularly.