





## Aru BD S-78 Modern EX

### Outwards opening Scandinavian type wooden balcony door


- Made to Measure Sizes
- Frame 115x54 mm
- Sash profile thickness 78 mm
- Gasket around the frame
- Timber selection:
  - frame from fingerjointed, knotted or selected laminated pine timber;
  - threshold from oak timber;
  - door leaf from laminated pine or oak timber
- Timber finishing with waterbased paint or stain. Paint according to RAL colour chart, stain according to manufacturer's samples.
- Triple glazing, thickness 44 mm
- Glazing with glazing beads outside, fastened with hidden nails. Sealed with internal and external gasket
- Glazing bar options:
  1. penetrating bars
  2. glued on both sides of the glass+slats inside the glazing (Norwegian style)
  3. glued on both sides of the glass (Georgian style)
  4. removable on the outside
  5. decorative bars inside the glazing
  6. bar frame on the hinges (outside)

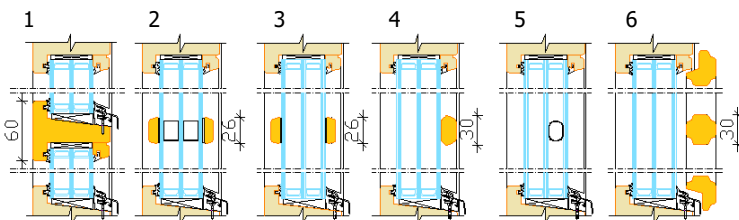


- Crossbars 115 or 96 mm




- Panels:
  - insulated flush panel
  - insulated profile panel (vertical/ horizontal/ diagonal/ herringbone)
  - raised/moulded panel
  - timber profile blanking inside and outside fixed with screws
  - timber profile blanking outside, insulated panel or timber panel inside



- 2D adjustable hinges
- Standard locking mechanism: multi point espagnolette (braking system from handle) + handle only inside
- Extras:
  - jamb extensions, grooves for jamb extension, key lockable handles, design handles, both side handles, special glasses (toughened, laminated, sun protection, self cleaning, pattern etc), various glass spacers
- Combinations with fixed parts

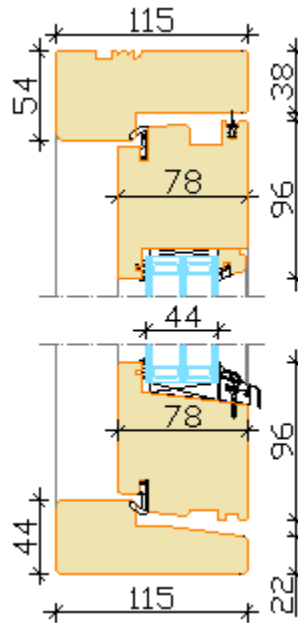


OPENINGS  
Views from outside



LEFT RIGHT


Single door  
minimum-maximum  
Width 485...1170 mm  
Height 1830...2400 mm,  
Door leaf weight max 70 kg




LEFT active RIGHT active

Double door  
Active part  
minimum-maximum  
Width 440...1130 mm  
Height 1941...2400 mm,  
Door leaf weight max 70 kg  
Passive part  
minimum-maximum  
Width 390...1130 mm  
Height 1941...2400 mm,  
Door leaf weight max 70 kg


Standard jamb

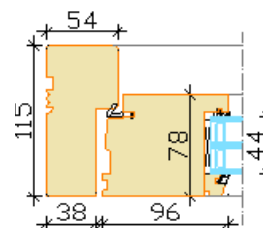


Middle part of double door

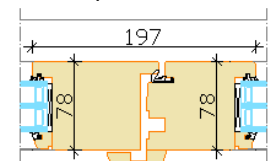


Jamb with Groove



Mullion



Jamb with extension

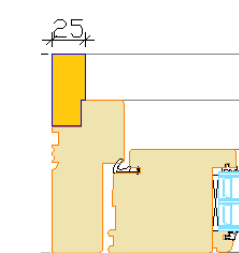

Transom

