

**DRY<sup>®</sup>  
BOX**

**X2**

ADSORPTIONSAVFUKTARE

For removal  
of moisture damage



# DRY<sup>®</sup> BOX X2

ADSORPTION DEHUMIDIFIER  
FOR REMOVAL OF MOISTURE DAMAGE



## DRYBOX X2


- Consists of an adsorption fan with an exhaust air duct for moisture-saturated air and two dry air ducts
- The service- area is up to 250 m<sup>2</sup>
- Capacity up to 19 l / 24 hours
- Energy efficient

**X2** is an adsorption air dryer to prevent damage in wet rooms.

**X2** consists of a dehumidifier with an exhaust air-duct for moisture-saturated air and two air ducts for dry air. The air is sucked into the dehumidifier where it is dehumidified. Moisture-saturated air is carried out through an exhaust air duct to the outside of the building. Dry air circulates via the two dry air ducts. No collection container for liquid is needed.

**X2** can dehumidify spaces of up to 250 m<sup>2</sup>.

**X2** has a dehumidification capacity of 19 l / 24 hours.

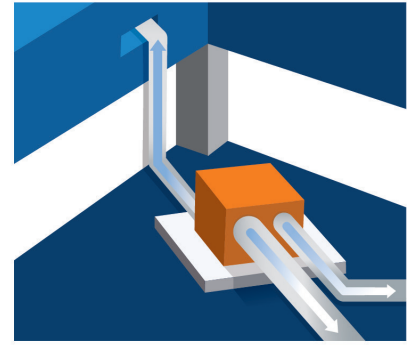

Install the dry air ducts & the exhaust air duct according to the sketch. Attach the exhaust duct to the air valve.

## TECHNICAL DATA

Dry air volume	250 m <sup>3</sup> /h
Wet air volume	35 m <sup>3</sup> /h
Dry air emissions	1 x 63 mm/1 x 100 mm
Wet air emissions	63 mm
Up till	250 m <sup>2</sup>
Noise level( 3m)	52 dB
Weight	11 Kg
Height x width x depth	285 x 335 x 425
Dehumidifying capacityt	19 l/24 hours
Connection	230V/ 50Hz
Load	805W
Filter	Inside
change	

## Installation set

Dry air duct	Ø 63 mm x 6 meter
Dry air duct	Ø 100 mm x 6 meter
Wet air duct	Ø 63 mm x 1,5 meter
Air filter	2-pack
Connection plate	1 pcs

AMROX GROUP AB (Mätforum AB)  
TEL:08-82 25 50  
MAIL: INFO@MAETFORUM.SE

RESELLER

Riit trading OÜ  
Phone:+372 5094 786  
E-mail:riit.tarmo@riittrading.com  
www.riittrading.com

